
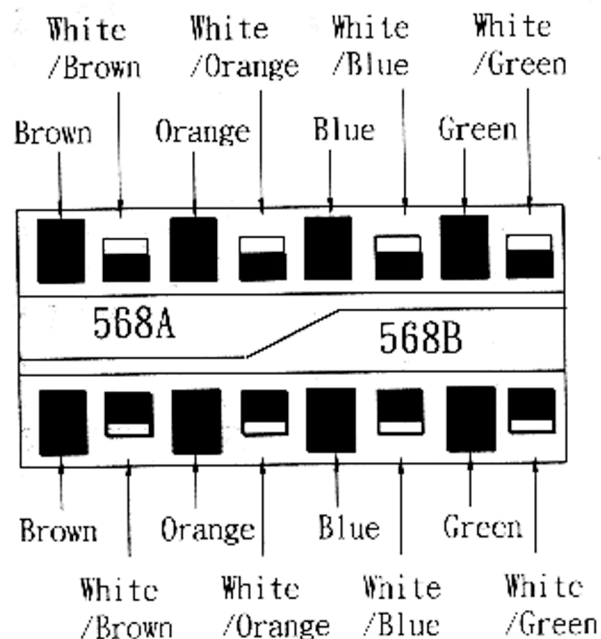
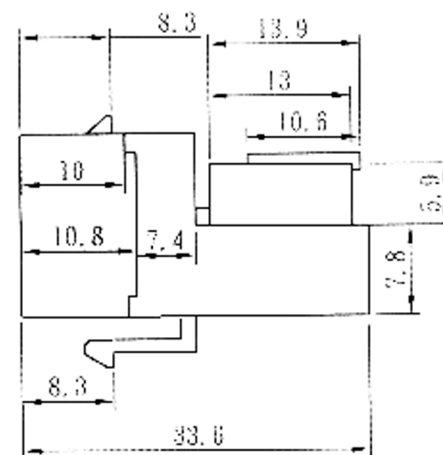
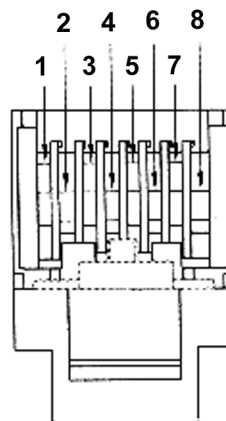


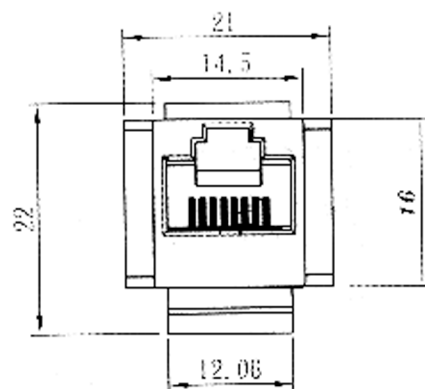

## SPECIFICATION

### MECHANICAL:

Housing: ABS UL 94V-0

Housing color: Black

Operation Temperature: -40C to 80C

PCB: FR4 1.6mm 2 layer

Key Lock: ABS LL 94V-0

Jack: Unshielded RJ45 Keystone 50u"gold plated

Durability: 500 cycles

Tensile Strength: 7.7 kgs

Voltage Range: AC 150 volages Max

Tool: Toolless EIA/TIA 568A&B

NOTE: TOL  $\pm 0.1\text{mm/m}$

|           |      |     |
|-----------|------|-----|
|           | DSGN | SAM |
|           | CHK  |     |
| UNIT: m/m | APPR |     |
| SCALE:    |      |     |
| DWG NO:   |      |     |
| 041702-1  |      |     |

