

Instruction / Installation Sheet

DataComm Electronics 50-3331-WH-KIT & 50-3332-WH-KIT Recessed Cable Plate Installation Kits



DataComm Electronics, Inc.
6349 Peachtree Street
Norcross, GA 30071-1725
888.223.7977
770.662.8205
www.datacommelectronics.com

Parts Included

1. Two (2) recessed cable plates
2. Two (2) low voltage mounting brackets

Tools Needed

1. Drywall saw
2. 6 Ft. tape measure
3. Pencil
4. Screwdriver

Use DataComm Electronics' new Single and Double Gang Recessed Cable Plate Installation Kits to install low voltage cables behind your flat panel TV, (see **Figures 2 & 3**), your amplifier or other audio and video devices. These recessed low voltage cable plates are designed for use with **Low Voltage / Data cables "ONLY"**.

The 50-3331-WH-KIT and 50-3332-WH-KIT kits are designed to be used with the enclosed single gang and double gang low voltage mounting brackets (see **Figure 1**). The recessed cable plates can be installed upright or upside down (see **Figures 2 & 3 for upright installation**).

Determine the location of your flat panel TV, amplifier or audio/video device. Allow for location of the stud when cutting a hole in the wall to install the low voltage mounting plate bracket. Using the enclosed instructions, mount the low voltage mounting bracket in the opening you have cut in the drywall. Then simply pull your audio/video cables through the mounted low voltage mounting plate bracket and then through the DataComm Electronics recessed cable plate. Insert the DataComm Electronics recessed cable plate into your mounting plate bracket and using the supplied wall plate screws, secure the wall plate tightly to the wall.

These Recessed Cable Plates are Designed for Use with Low Voltage / Data Cables "ONLY".

Do Not Run or Pull the TV Cord or Other Electrical Cords Inside the Drywall. National Electrical Code (NEC) Does Not Allow the Installation of the TV Power Cord or an Extension Cord Behind the Wall.

CAUTION

- Never install low voltage wiring during lightning storms.
- Never install low voltage wiring in wet locations unless the wire is specifically designed for wet locations.
- Never touch un-insulated low voltage wires or terminals unless the wire has been disconnected at its source.
- Use caution when installing low voltage cables.

IMPORTANT INSTRUCTIONS

- Read and understand all instructions.
- Follow all warning and instructions marked on the product.
- Do not use this product near water, for example near a bath tub, wash bowl, kitchen sink, or laundry tub, in a wet basement, or near a swimming pool.
- SAVE THESE INSTRUCTIONS.

This product is patent protected by U.S. Patent numbers D553475, D554475 and 7390964.

Multiple patents pending.



50-3331-WH-KIT



50-3332-WH-KIT

Figure 1

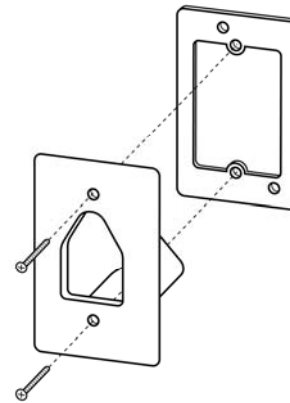


Figure 2 - Front View

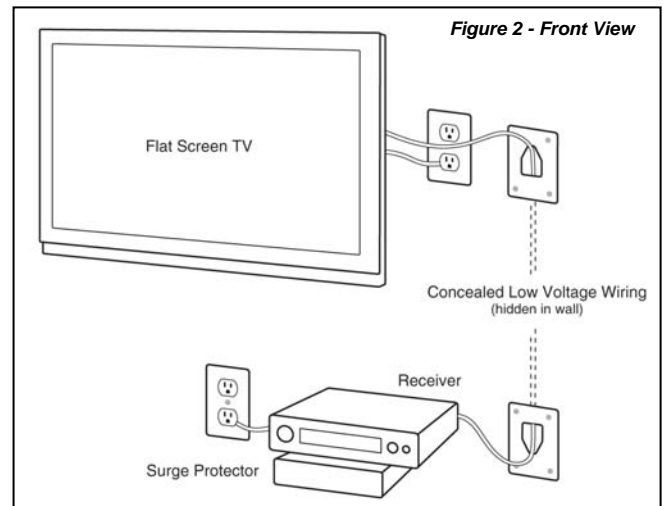


Figure 3 - Back View

