

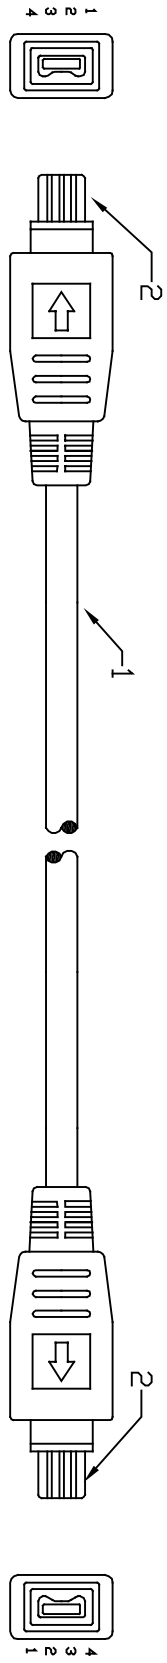


REVISIONS		
REV	DESCRIPTION	APPROVED

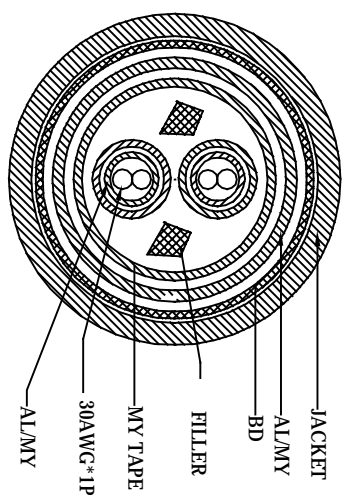


P1 4PIN MALE

4PIN MALE P2



SECTION A-A

PIN OUTS	
P1 1394-4PINM	P2 1394-4PINM

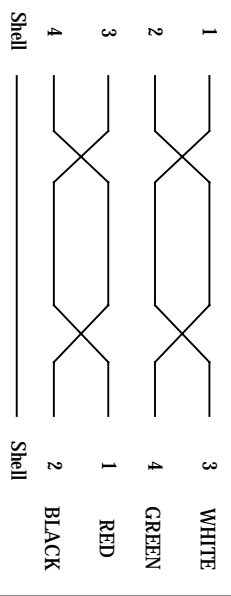

ITEM NO	PART	NAMES	QTY	REMARK
1	CABLE:JEEF1394 2P		1PCS	
2	CONNECTOR:1394 4P MALE NICKEL-PLATING INSULATOR COLOR:BLACK		2PCS	

INSULATION: UPON 1M ohm AND 1M ohm ELECTRIC CONDUCTION:INSIDE 1.5K ohm

- NOTES:
- 1.CABLE: { [30AWG(7/0.103)\* 1P+ AL/MY+SPIRAL(50/0.10)]\*2C+ FILLER+MY+90 %BD(24/5/0.12)]TIN INSULATION WIRE ONE:FO-PE:OD=  $\phi$  0.88  $\pm$  0.05MM
  - COLOR: RED&GREEN BLUE&ORANGE
  - JACKET:80 ° C PVC OD=  $\phi$  4.8  $\pm$  0.15MM
  - COLOR:PLATINUM GRAY
  - 2.PVC:PLATINUM GRAY
  - 3.FINISHED PRODUCTS LENGTH:
  - (1) LENGTH:1829mm ,TOLERANCE:25.4mm
  - (2) LENGTH:3048mm ,TOLERANCE:50.8mm
  - (3) LENGTH:4572mm ,TOLERANCE:50.8mm

 Discount Computer Cables and Connectivity Solutions	PRDDUCT	1394 4PMALE TO 139444PMALE	CUSTOMER	DRAWN	Hyon ,W	 THREE ANGLE PROJECTION
	CUS,ND	1394BB-XXX	VERSION	CHECKED	Jackson Cang	
DR,ND	SD1394BB-XXX	DRAWN DATE	OCT.15.2000	APPROVERD	Jonny Chuang	