

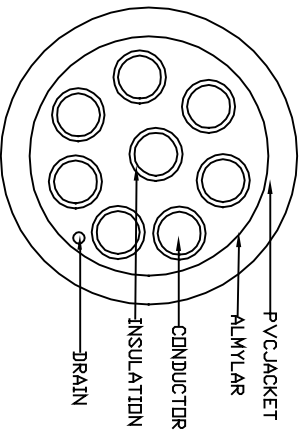


REVISIONS		
REV	DESCRIPTION	APPROVED

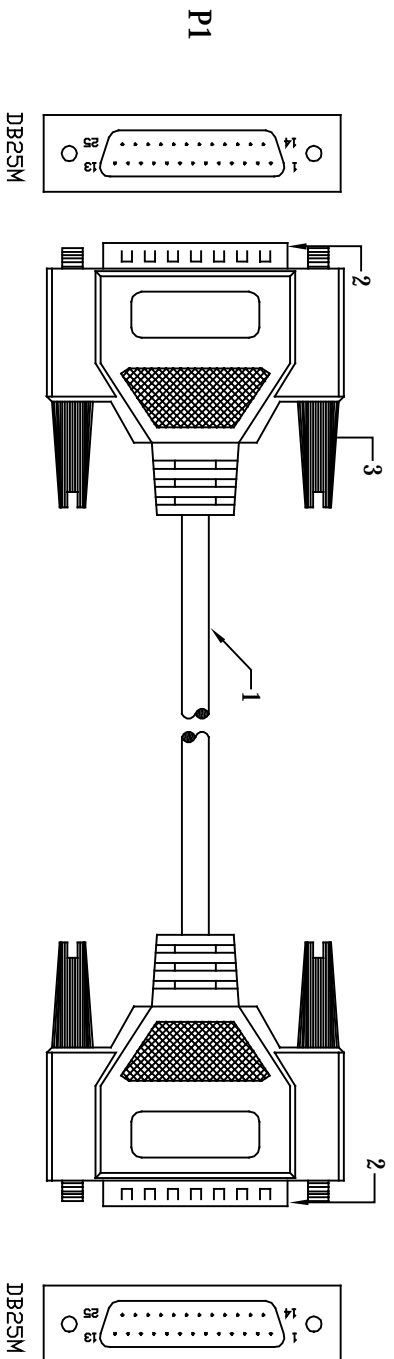

NOTES:

1.MOLDED CONNECTOR END REQUIREMENTS:

AINNER MOLD USING PE

BALUMINUM FOIL WRAP TO CONNECTOR

CIPVC - 4SP PLATINUM GRAY

2.CABLE#128AWG (7/0.12)*8C+AL/MY +DW(7/0.16)JTIN

WIRE I.D.=0.78±0.03mm

COLOR: P1 COLOR CODE

JACKET: PVC DD=5.0±0.15mm

COLOR:PLATINUM GRAY

3.FINISHED PRODUCTS LENGTH:

(1) LENGTH=1829mm TOLERANCE±25.4mm

(2) LENGTH=3048mm TOLERANCE±50.8mm

(3) LENGTH=4572mm TOLERANCE±50.8mm

PIN	OUT	DB25F
1	BLACK	1
2	BROWN	3
3	RED	2
4	ORANGE	5
5	YELLOW	4
7	GREEN	7
6	BLUE	20
8		
20	PURPLE	6
		8

DB25M	DB25F
1	1
2	3
3	2
4	5
5	4
7	7
6	20
8	
20	6
	8

ITEM NO	PART	NAMES	INSULATION UPON 1M ohm AND 1M ohm	ELECTRIC CONDUCTION INSIDE 15K ohm
3	THUMBSCREW	MALE 4*47mm	NICKEL-PLATING	4PCS
2	CONNECTOR	DB25P MALE	NICKEL-PLATING, INSULATOR	2PCS
1	CABLE	#8C+1 28AWG		1PCS

PRODUCT	DB25P MALE TO DB25P MALE	CUSTOMER	DRAWN	Hvon 'W	THREE ANGLE PROJECTION
CUS,NO		VERSION	CHECKED	Jackson Cang	
DR,NO		DRAWN DATE	APPROVED	Jonny Chuang	

