

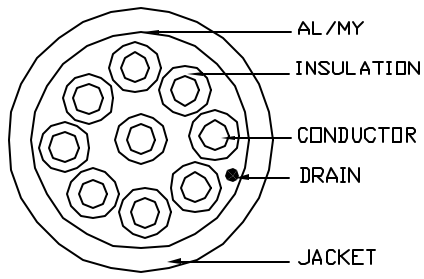


| REVISIONS | | |
|-----------|-------------|----------|
| REV | DESCRIPTION | APPROVED |
| | | |

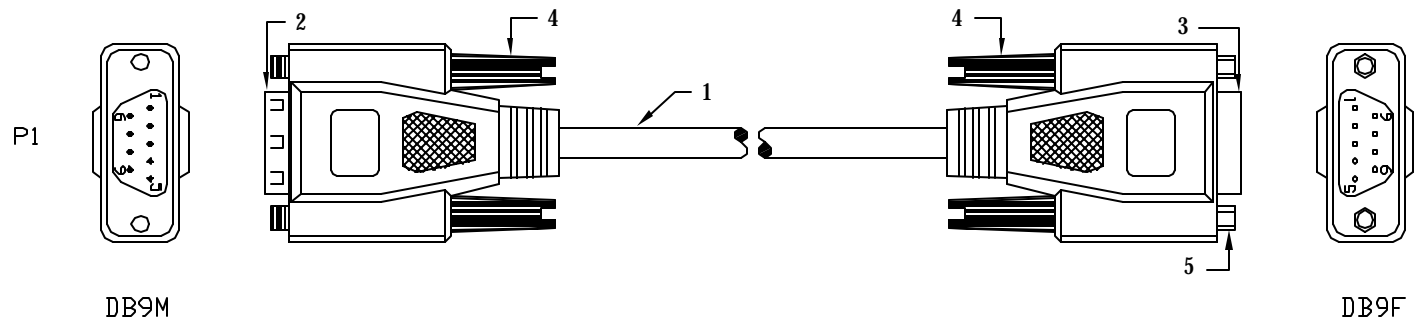

NOTES:

- MOLDED CONNECTOR END REQUIREMENTS:
 - A. INNER MOLD USING PE
 - B. ALUMINUM FOIL WRAP TO CONNECTOR
 - C. PVC - 45P PLATINUM GRAY
- CABLE: (28AWG (7/0.12)*9C+AL/MY +DW(7/0.16))JIN
 WIRE: $\phi D=0.78 \pm 0.03 \text{mm}$
 COLOR: P1 COLOR CODE
 JACKET: PVC $\phi D=5.0 \pm 0.15 \text{mm}$
 COLOR: PLATINUM GRAY

3. FINISHED PRODUCTS LENGTH:

- LENGTH=1829mm TOLERANCE: $\pm 25.4 \text{mm}$
- LENGTH=3048mm TOLERANCE: $\pm 50.8 \text{mm}$
- LENGTH=4572mm TOLERANCE: $\pm 50.8 \text{mm}$
- LENGTH=7625mm TOLERANCE: $\pm 76.2 \text{mm}$
- LENGTH=15250mm TOLERANCE: $\pm 76.2 \text{mm}$
- LENGTH=30480mm TOLERANCE: $\pm 101.6 \text{mm}$

| PIN | OUTS |
|-----------|-------------|
| DB9P MALE | DB9P FEMALE |
| 1 | BLACK 1 |
| 2 | BROWN 2 |
| 3 | RED 3 |
| 4 | ORANGE 4 |
| 5 | YELLOW 5 |
| 6 | GREEN 6 |
| 7 | BLUE 7 |
| 8 | PURPLE 8 |
| 9 | WHITE 9 |
| Shell | Shell |

| ITEM NO | PART NAMES | Q'TY | REMARK |
|---------|--|------|--------|
| 5 | (SCREW)NUT: 4.75*6mm NICKEL-PLATING | 2PCS | |
| 4 | THUMBSCREW MALE 4*47mm NICKEL-PLATING | 4PCS | |
| 3 | CONNECTOR:DB9P FEMALE NICKEL-PLATING, INSULATOR COLOR:BLUE | 1PCS | |
| 2 | CONNECTOR:DB9P MALE NICKEL-PLATING, INSULATOR COLOR:BLUE | 1PCS | |
| 1 | CABLE:9C+1 28AWG | 1PCS | |



| | |
|---------|--------------------------|
| PRODUCT | DB9P MALE TO DB9P FEMALE |
| CUS,NO | 128-XXX |
| DR,NO | SD128-XXX |

| | | | |
|------------|-------------|-----------|-----------|
| CUSTOMER | | DRAWN | Hvon .W |
| VERSION | | CHECKED | Jackson H |
| DRAWN DATE | DEC.21.2002 | APPROVERD | Jacky Lin |

