



REVISIONS		
REV	DESCRIPTION	APPROVED

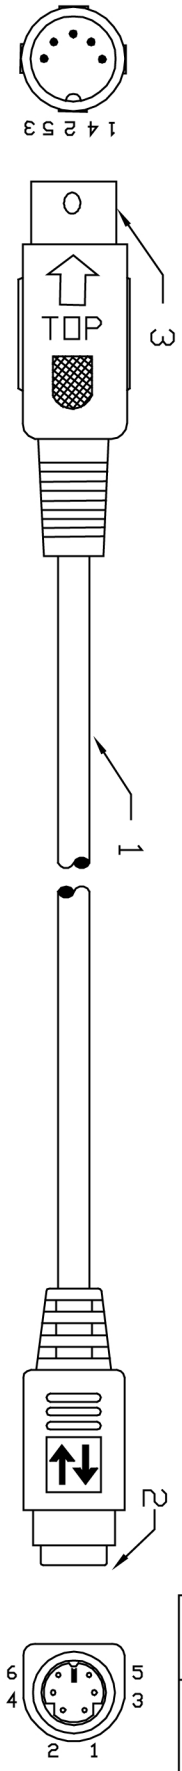

A DIN5 MALE

B MD6 FEMALE

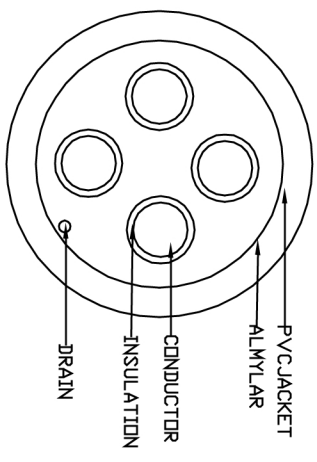

**SECTION A-A**



NOTES:  
 1.MOLDED CONNECTOR END REQUIREMENTS:  
 A.INNER MOLD USING PE  
 B.ALUMINUM FOIL WRAP TO CONNECTOR  
 C:PVC - 45P PLATINUM GRAY

3.FINISHED PRODUCTS LENGTH:  
 (1) LENGTH=305mm TOLERANCE:±25.4mm

2.CABLE:[28AWG (7/0.12)\*4C+ALMY +DW(7/0.16)]TIN  
 WIRE:OD=0.78±0.03mm

COLOR: BLACK,BROWN,RED,ORANGE  
 JACKET: PVC OD=4.0H0.15mm  
 COLOR:PLATINUM GRAY

PIN OUTS		
A	B	COLOR
MALE DIN5	FEMALE MD6	
1	5	BLACK
2	1	BROWN
3	2	RED
4	3	ORANGE
5	4	
Shell	6	

ITEM NO	PART	NAMES	QTY	REMARK
INSULATION: UPON 1M ohm AND 1M ohm ELECTRIC CONDUCTION:INSIDE 1.5K ohm				
3	CONNECTOR:DIN5P MALE NICKEL-PLATING INSULATOR	COLOR:BLACK	1PCS	
2	CONNECTOR:MINI DIN 6P FEMALE NICKEL-PLATING, INSULATOR	COLOR:BLACK	1PCS	
1	CABLE:4C+1 28AWG		1PCS	

PRODUCT	MINI DIN 6P FEMALE TO DIN 5P MALE	CUSTOMER	DRAWN	THREE ANGLE PROJECTION
CUS,NO		VERSION	CHECKED	
DR,NO		DRAWN DATE	APPROVED	

