



REVISIONS		
REV	DESCRIPTION	APPROVED

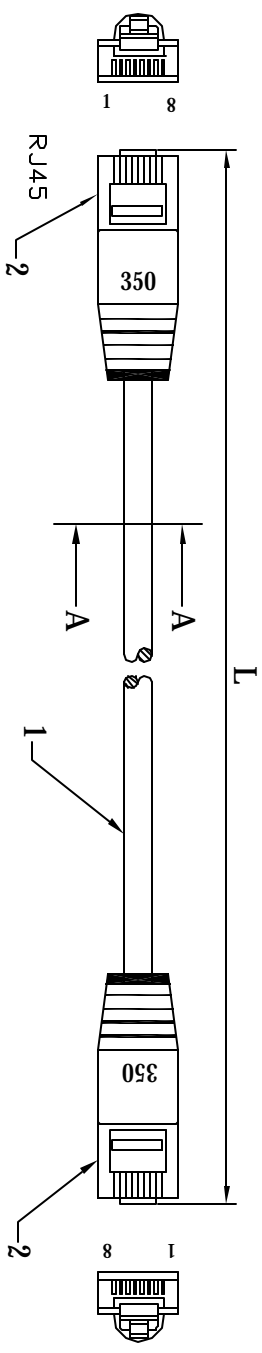

NOTES:  
 1.MOLDED CONNECTOR END REQUIREMENTS:  
 A.PVC - 65P BLUE, GREEN, BLACK, ORANGE, RED,  
 GRAY, WHITE, OR YELLOW TO MATCH COLOR OF  
 CABLE

NOTES:  
 CABLE: [24AWG(7/0,209)\*\*4P]BARE  
 INSULATION: HD-PE DD= $\phi$ 1.0 $\pm$ 0.02MM  
 COLOR: BL&WH/BL, OR&WH/OR, GN&WH/GN, BN&WH/BN  
 JACKET: 80°C PVC DD= $\phi$ 5.3 $\pm$ 0.3MM  
 COLOR: CHOICE OF - BLUE, GREEN, BLACK, ORANGE,  
 RED, GRAY, WHITE, OR YELLOW  
 PRINT: ENHANCED 350MHZ PATCH CORD 24AWG  
 4PR 2835 E87647-DG AW 60°C 30V  
 LL58663 CSA AWM 80°C 30V FT1 ETL VE  
 RIFTED TO T1A/EIA 568A CAT5e

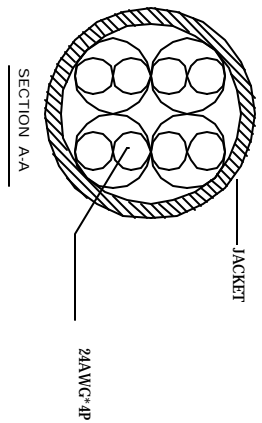

P/N	LENGTH(only)	TOLERANCE(only)
8-7950-001	1 FT	±25.4
8-7950-002	2 FT	±25.4
8-7950-003	3 FT	±25.4
8-7950-004	4 FT	±25.4
8-7950-005	5 FT	±25.4
8-7950-006	6 FT	±25.4
8-7950-007	7 FT	±25.4
8-7950-008	8 FT	±25.4
8-7950-010	10 FT	±25.4
8-7950-012	12 FT	±50.8
8-7950-014	14 FT	±50.8
8-7950-015	15 FT	±50.8
8-7950-020	20 FT	±50.8
8-7950-025	25 FT	±76.2
8-7950-050	50 FT	±76.2
8-7950-075	75 FT	±76.2
8-7950-100	100 FT	±76.2

PIN OUTS			
WIRE COLOR	RJ45 PLUG	RJ45 PLUG	WIRE COLOR
WHITE/ ORANGE	1	1	WHITE/ ORANGE
ORANGE	2	2	ORANGE
WHITE/GREEN	3	3	WHITE/GREEN
BLUE	4	4	BLUE
WHITE/ BLUE	5	5	WHITE/ BLUE
GREEN	6	6	GREEN
WHITE/ BROWN	7	7	WHITE/ BROWN
BROWN	8	8	BROWN

ITEM NO	PART	NAMES	Q'TY	REMARK
1	CABLE: 24AWG 4PR 350MHZ CAT5e	DD=5.3 $\pm$ 0.3mm	1PCS	
2	PLUG : RJ45 MOLDED	8P8C	2PCS	

INSULATION UPON IN ohm AND IN ohm ELECTRIC CONDUCTIVITY INSIDE 15K ohm COLOR AS LISTED

PRODUCT	RJ45/RJ45	CAT5E	CUSTOMER	DRAWN	Ocean .F	THREE ANGLE REFLECTION
CUS,NO	8-7950-XXX		VERSION	CHECKED	Jackson Cang	
DR,NO	SD241SC-XXX-XSF		DRAWN DATE	DCE.20.2000	APPROVERD	ROY

