


REVISIONS		
REV	DESCRIPTION	APPROVED

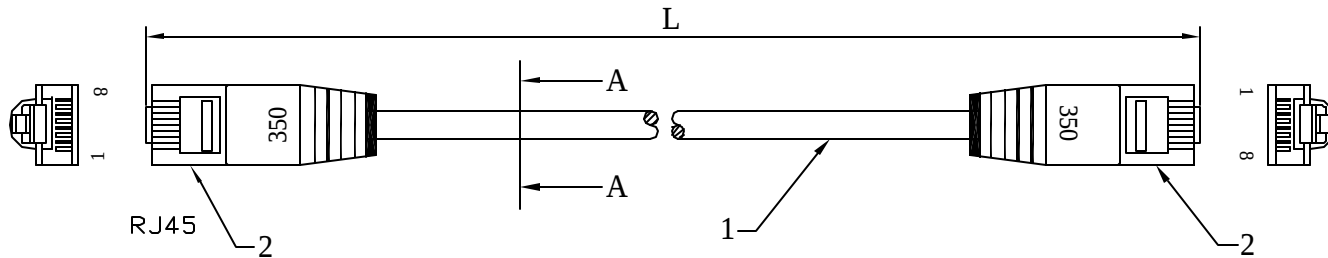


NOTES:

1.MOLDED CONNECTOR END REQUIREMENTS:
A:PVC - 65P BLUE, GREEN, BLACK, ORANGE, RED,
GRAY, WHITE, OR YELLOW TO MATCH COLOR OF
CABLE

NOTES:

CABLE: [24AWG(7/0.209)*4P]BARE
INSULATION: HD-PE $\phi D=\phi 1.0\pm 0.02MM$
COLOR: BL&WH/BL. OR&WH/OR. GN&WH/GN. BN&WH/BN
JACKET: 80°C PVC $\phi D=\phi 5.3\pm 0.3MM$
COLOR: CHOICE OF -- BLUE, GREEN, BLACK, ORANGE,
RED, GRAY, WHITE, OR YELLOW
PRINT: ENHANCED 350MHZ PATCH CORD 24AWG
4PR 2835 E87647-DG AWM 60°C 30V
LL58663 CSA AWM 80°C 30V FT1 ETL VE
RIFIED TO TIA/EIA 568A CAT5e

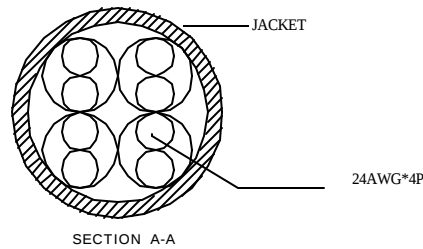

568B PIN OUTS			
WIRE COLOR	RJ45 PLUG	RJ45 PLUG	WIRE COLOR
WHITE/ ORANGE	1	1	WHITE/ ORANGE
ORANGE	2	2	ORANGE
WHITE/GREEN	3	3	WHITE/GREEN
BLUE	4	4	BLUE
WHITE / BLUE	5	5	WHITE / BLUE
GREEN	6	6	GREEN
WHITE / BROWN	7	7	WHITE / BROWN
BROWN	8	8	BROWN

P/N	LENGTH(mm)	TOLERANCE(mm)
241Sc-1F-X5F	305	± 25.4
241Sc-2F-X5F	610	± 25.4
241Sc-3F-X5F	914	± 25.4
241Sc-4F-X5F	1219	± 25.4
241Sc-5F-X5F	1524	± 25.4
241Sc-6F-X5F	1829	± 25.4
241Sc-7F-X5F	2134	± 25.4
241Sc-8F-X5F	2438	± 25.4
241Sc-9F-X5F	2743	± 25.4
241Sc-10F-X5F	3048	± 50.8
241Sc-12F-X5F	3658	± 50.8
241Sc-14F-X5F	4267	± 50.8
241Sc-15F-X5F	4572	± 50.8
241Sc-20F-X5F	6096	± 76.2
241Sc-25F-X5F	7620	± 76.2
241Sc-30F-X5F	9144	± 76.2
241Sc-35F-X5F	10668	± 76.2
241Sc-40F-X5F	12192	± 76.2
241Sc-50F-X5F	15240	± 76.2
241Sc-60F-X5F	18288	± 101.6
241Sc-75F-X5F	22860	± 101.6
241Sc-100F-X5F	30480	± 101.6

INSULATION UPON 1M ohm AND 1M ohm		ELECTRIC CONDUCTION(INSIDE 15K ohm		COLOR AS LISTED	
2	PLUG : RJ45 MOLDED 8P8C			2PCS	
1	CABLE: 24AWG 4PR 350MHz CAT5e $\phi D=5.3\pm 0.3mm$			1PCS	
ITEM NO	PART NAMES			Q'TY	REMARK



PRODUCT	RJ45/RJ45 CAT5E	CUSTOMER		DRAWN	Ocean .F	 THREE ANGLE PROJECTION
CUS,NO	8-CAT5EBL-XXX	VERSION		CHECKED	Jackson Cang	
DR,NO		DRAWN DATE	DCE.20.2000	APPROVERD	ROY	