
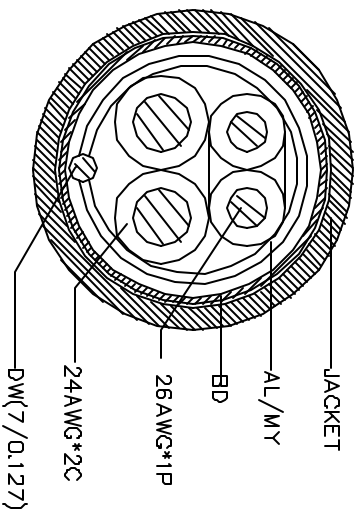


REVISIONS		
REV	DESCRIPTION	APPROVED

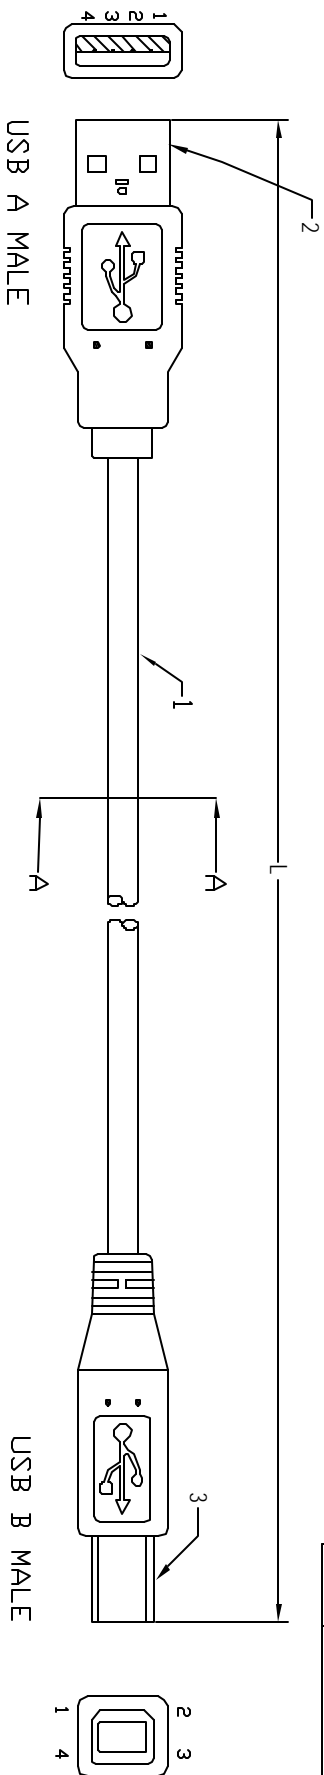

NOTES:
 1.MOLDED CONNECTOR END REQUIREMENTS:
 APVC -45P PLATINUM GRAY
 2.CABLE(26AWG (7/0.163)*1P+24AWG(7/0.203)*2C
 +AL/MY+DW(7/0.203)+90%BD(16/5/0.12)111N
 INSULATION WIRE ONE:F-D-PE,DD=01.18±0.04mm
 COLOR: WHITE&GREEN
 INSULATION WIRE TWO:SR-PVC,DD=01.15±0.05mm
 COLOR: BLACK,RED
 JACKET:80°C 80P PVC DD=5.5±0.15mm
 MARKING: USB SHIELDED 26AWG /2C+24AWG/2C E126126
 -DG UL CM 75°C LLS8663 CSA AWM I/II A/B
 80°C 30V FT1 USB 2.0 TID: 60000223
 COLOR:PLATINUM GRAY

3.FINISHED PRODUCTS LENGTH:

- (1) LENGTH=914mm TOLERANCE±25.4mm
- (2) LENGTH=1829mm TOLERANCE±25.4mm
- (3) LENGTH=3048mm TOLERANCE±50.8mm
- (4) LENGTH=4572mm TOLERANCE±50.8mm

USB AM	WIRE COLOR	USB BM
1	RED	1
2	WHITE	2
3	GREEN	3
4	BLACK	4
SHELL		SHELL

ITEM NO	PART NAMES	ELECTRIC CONDUCTOR	INSIDE	LENGTH
1	CABLE:USB 26AWG*1P+24AWG*2C			
2	CONNECTOR:USB A MALE PLATE WITH GOLD INSULATOR COLOR:WHITE			
3	CONNECTOR:USB B MALE PLATE WITH GOLD INSULATOR COLOR:WHITE			
4	CONNECTOR:USB A MALE PLATE WITH GOLD INSULATOR COLOR:WHITE			

PRODUCT	USB A MALE TO USB B MALE (2.0)	CUSTOMER	DRAWN	ELAN XIE	THREE ANGLE PROJECTION
CUS,NO	600-XX	VERSION	CHECKED	JACKSON GANG	
DR,NO	SD600-XX	DRAWN DATE	APPROVED	ERIC LEE	