


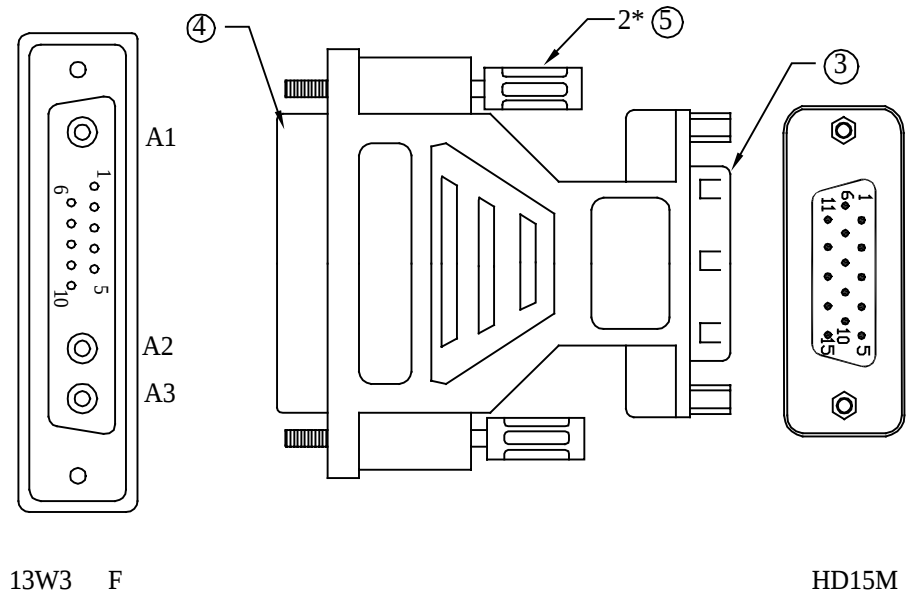

REVISIONS		
REV	DESCRIPTION	APPROVED

13W3 F

HD15M

NOTES:

1.MOLDED CONNECTOR END REQUIREMENTS:


A.INNER MOLD USING PE

B.COPPER FOIL WRAP AND 360° SOLDER TO CONNECTOR

C.PVC - 45P PLATINUM GRAY

P1	WIRE COLOR	P2
A1(+)	COAX CENTER	1
A1(-)	COAX SHIELD	6
A2(+)	COAX CENTER	2
A2(-)	COAX SHIELD	7
A3(+)	COAX CENTER	3
A3(-)	COAX SHIELD	8
5		13
10,4		10
7		14
6		12
1		15
SHELL	SHIELD	SHELL

INSULATION: UPON 1M ohm AND 1M ohm ELECTRIC CONDUCTION:INSIDE 1.5K ohm			
5	THUMBSCREW: MALE 4*32mm NICKEL-PLATING	2PCS	
4	CONNECTOR:13W3 FEMALE NICKEL-PLATING, INSULATOR COLOR:BLACK	1PCS	
3	CONNECTOR:HD15P MALE NICKEL-PLATING, INSULATOR COLOR:BLACK RIVETING SCREW NUT	1PCS	
2	CABLE:COAXIAL 24AWG	3PCS	
1	CABLE:JUMPER 28AWG	6PCS	
ITEMNO	PART NAMES	QTY	REMARK

	PRODUCT	HD15P MALE TO 13W3 FEMALE ADAPTER	CUSTOMER		DRAWN	Hvon .W	
	CUS,NO	343	VERSION		CHECKED	Jackson Cang	
	DR,NO	SD343	DRAWN DATE	OCT.10,2000	APPROVED	Jonny Chuang	