


REVISIONS		
REV	DESCRIPTION	APPROVED

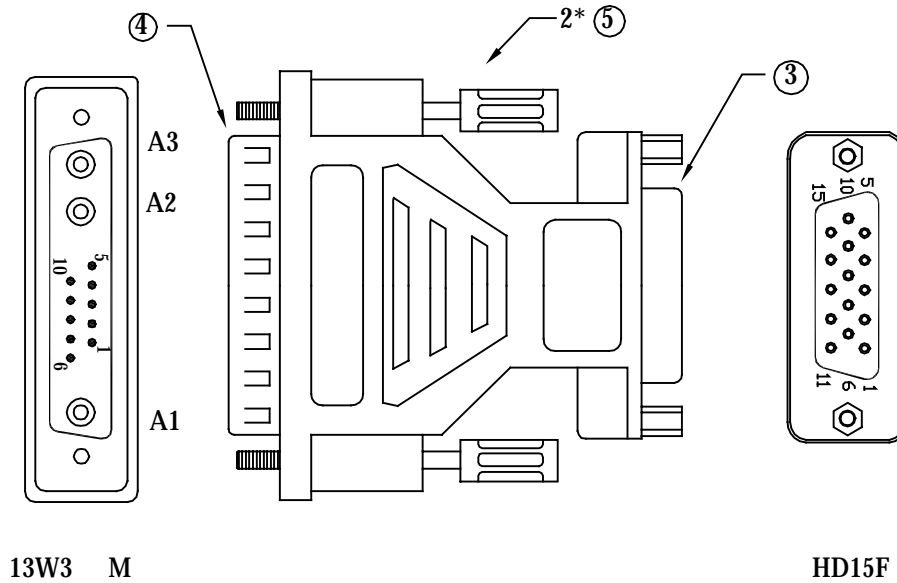

13W3 M

HD15F

P1	WIRE COLOR	P2
A1(+)	COAX CENTER	1
A1(-)	COAX SHIELD	6
A2(+)	COAX CENTER	2
A2(-)	COAX SHIELD	7
A3(+)	COAX CENTER	3
A3(-)	COAX SHIELD	8
4		5
9		
2		9
10		10
6		12
5		13
7		14
1		15
SHELL	SHIELD	SHELL

RESISTANCE:1/8 WATT 100ohm

NOTES:

- 1.MOLDED CONNECTOR END REQUIREMENTS:
- A.INNER MOLD USING PE
- B.COPPER FOIL WRAP AND 360° SOLDER TO CONNECTOR
- C.PVC - 45P PLATINUM GRAY
- D.RESISTANCE:1/8 WATT 100ohm

ITEMNO	PART NAMES	QTY	REMARK
INSULATION: UPON 1M ohm AND 1M ohm ELECTRIC CONDUCTION:INSIDE 1.5K ohm			
5	THUMBSCREW: MALE 4*32mm NICKEL-PLATING	2PCS	
4	CONNECTOR:13W3 MALE NICKEL-PLATING, INSULATOR COLOR:BLACK	1PCS	
3	CONNECTOR:HD15P FEMALE NICKEL-PLATING, INSULATOR COLOR:BLACK RIVETING SCREW NUT	1PCS	
2	CABLE:COAXIAL 24AWG	3PCS	
1	CABLE:JUMPER 28AWG	7PCS	

	PRODUCT	HD15P FEMALE TO 13W3 MALE ADAPTER	CUSTOMER		DRAWN	Hvon .W	 THREE ANGLE PROJECTION
	CUS,NO	342	VERSION		CHECKED	Jackson Cang	
	DR,NO	SD342	DRAWN DATE	OCT.10,2000	APPROVERD	Jonny Chuang	