
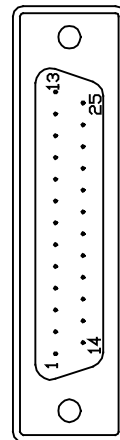


DB25PF

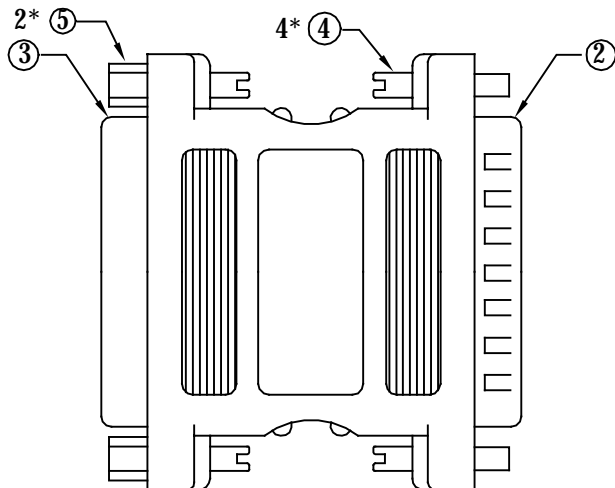

DB25PM

REVISIONS		
REV	DESCRIPTION	APPROVED

NOTES:

- 1.MOLDED CONNECTOR END REQUIREMENTS:
- A.INNER MOLD USING PE
- B.ALUMINUM FOIL WRAP TO CONNECTOR
- C.PVC - 45P PLATINUM GRAY

PIN		OUTS	
DB 25 FEMALE		DB 25 MALE	
1	_____	1	_____
3	_____	2	_____
2	_____	3	_____
5	_____	4	_____
4	_____	5	_____
7	_____	7	_____
20	_____	6	_____
6	_____	8	_____
8	_____	20	_____
Shell	_____	Shell	_____

INSULATION: UPON 1M ohm AND 1M ohm ELECTRIC CONDUCTION:INSIDE 1.5K ohm			
6	SPACER: 3.2*0.7mm NICKEL-PLATING	4PCS	
5	(SCREW)NUT: 4.75*6mm NICKEL-PLATING	2PCS	
4	THUMBSCREW: MALE 4*15mm NICKEL-PLATING	4PCS	
3	CONNECTOR:DB25P FEMALE NICKEL-PLATING, INSULATOR COLOR:BLUE	1PCS	
2	CONNECTOR:DB25P MALE NICKEL-PLATING, INSULATOR COLOR:BLUE	1PCS	
1	CABLE:JUMPER 26AWG OR 28AWG	11PCS	
ITEMNO	PART NAMES	QTY	REMARK

	PRODUCT	DB25P FEMALE TO DB25P MALE ADAPTER	CUSTOMER		DRAWN	Hvon .w	 THREE ANGLE PROJECTION
	CUS,NO	304	VERSION		CHECKED	Jackson Cang	
	DR,NO	SD304	DRAWN DATE	OCT.10,2000	APPROVERD	Jonny Chuang	