

See Table


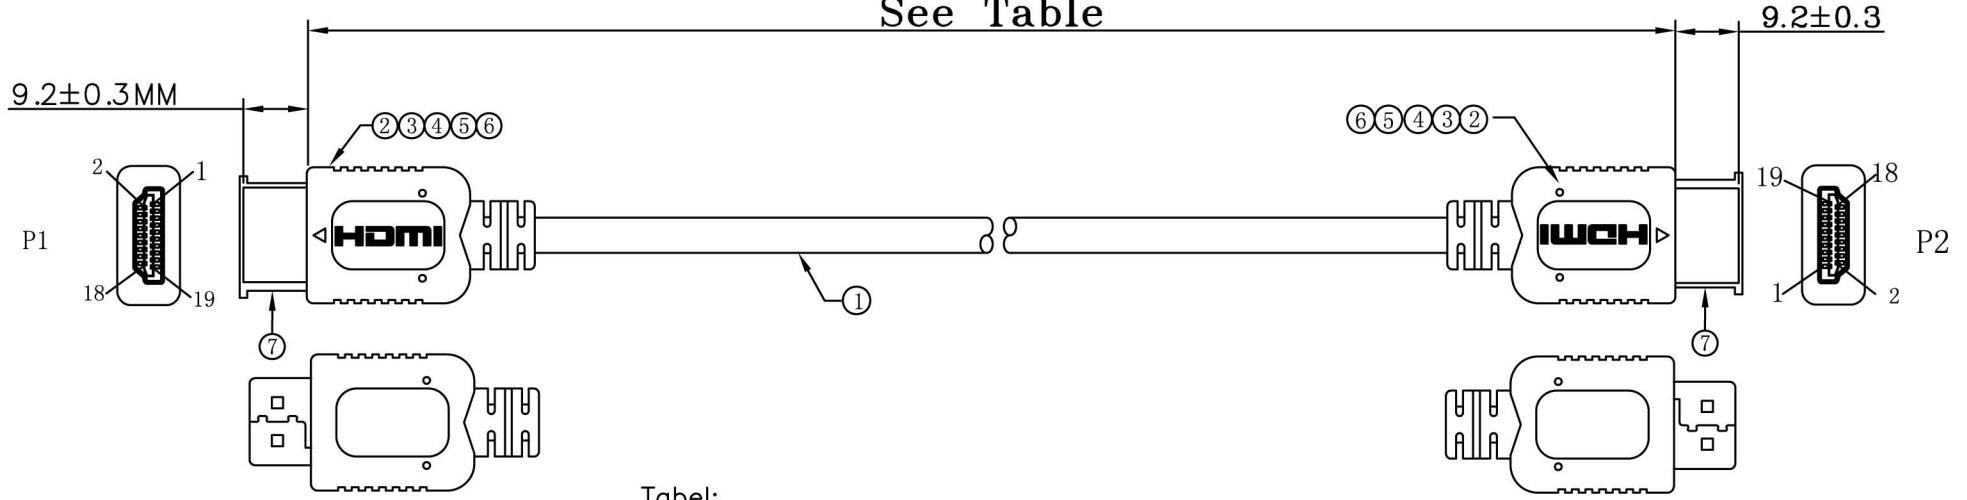


Table:

L	DRAWING P/N:	CUSTOMER P/N:
1000±20mm	CAD660005	AV-HDMIAA-001M
2000±30mm	CAD660006	AV-HDMIAA-002M
3000±40mm	CAD660007	AV-HDMIAA-003M
5000±50mm	CAD660008	AV-HDMIAA-005M
10000±150mm	CAD660009	AV-HDMIAA-010M

Pin Assignment

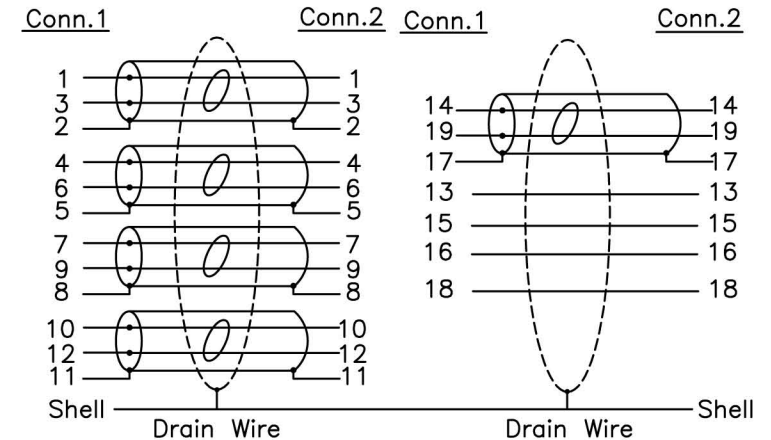

Electrical Test:

- 100%Test(Open ,short ,miss wire)
- Contact Resistance: 2 ohm max.
- Insulation Resistance: 10M ohm min.
- Hi-pot:300V DC/10ms

NO	DESCRIPTION	Q'TY	UNIT	REV.	DESCRIPTION	DATE
7	HDMI Transparent Dust Cover	2	pcs	 TOLERANCE INCHES M/M .X .015 .30 .XX .010 .10 .XXX .005 .05		CUSTOMER : CUSTOMER P/N :
6	TUBE: ϕ 1.5*16mm Black	2	pcs			
5	TUBE: ϕ 2.0*10mm Black	10	pcs			
4	Outside Molding:45P PVC PMS:Black	20	g	DRAWN BY	SCALE NONE	DRAWING NO.:
3	Inside Molding:PE	6	g	CHECK BY	UNIT MM	
2	HDMI A Type Male Shell Gold Plated, Insulation Black	2	pcs	APPD BY	DATE 10.10.06	See Table
1	UL20276 (7/0.127T*1PR+EAM)*5C+7/0.127T*4C+AEB AL(16*5/0.12) OD:7.3MM Black	1	M			1/1