


PA810 Series

Digital Audio Baluns & Balun Panels

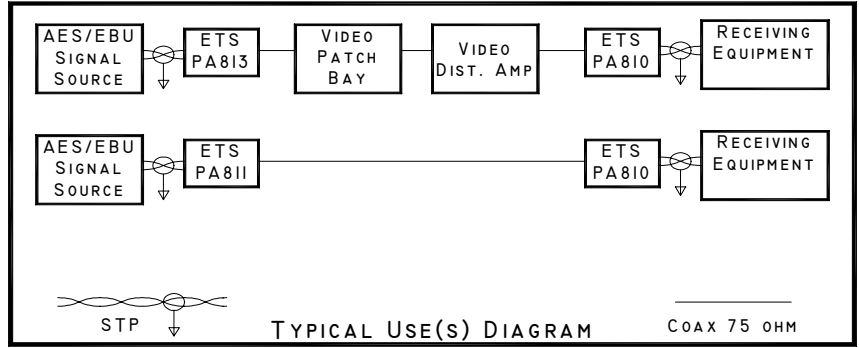

Features/Advantages	Description	Applications
<ul style="list-style-type: none"> Converts AES/EBU digital audio between balanced 110Ω XLR and unbalanced 75Ω BNC Separate baluns, or rack-mountable panel versions Panel mount has monitor port for each channel Available in isolated versions*, to route signals via video patch bays, eliminate ground loops 10 dB Pad available to attenuate signals to 1 V_{P-P} for compatibility with VDA and router equipment Metal cases, chassis Made in USA. 100% QA. 	<p>ETS, long a leader in baluns for computer networks, applies our expertise in Balanced Line™ technology to the XLR to BNC Digital Audio Baluns (DAB) and DAB Panels. The PA810 Series of baluns and balun panels from ETS are designed to connect AES/EBU signals from XLR output equipment into standard 75Ω coax cabling systems. These baluns perform precise impedance matching and signal balancing, allowing AES/EBU signals to be transmitted with greater signal integrity and longer runs over coaxial cable than can be achieved with STP wiring. Isolated versions are available for VDA and router applications.</p> <p>The newest members of this family are the PA818-X Digital Audio Panels. Incorporating all of the functionality of our baluns in a convenient, 8 channel, single rack height unit, an isolated outputs and monitor ports for each channel are standard.</p>	<ul style="list-style-type: none"> Broadcast Control Rooms Recording Studios Post Production Facilities Satellite TV Facilities

*NOTE: Versions of PA810, PA811, PA812 and PA813 available with isolation and with BNC male as custom order products.

Specifications		Product Ordering Information	
Bandwidth	20 kHz to 60 MHz (1 dB)	PA810	AES/EBU Balun, F-BNC to M-XLR
Connectors	XLR to BNC	PA811	AES/EBU Balun, F-BNC to F-XLR
Insertion Loss	< 0.15 dB	PA812	AES/EBU Balun, F-BNC to M-XLR, PAD to 1 V _{P-P}
Max Signal	5V _{P-P}	PA813	AES/EBU Balun, F-BNC to F-XLR, PAD to 1 V _{P-P}
Impedance Match	75 Ω to 110Ω	PA818-M	AES/EBU Panel, (8) M-XLR to F-BNC
Comm Mode Reject.	> 40 dB up to 40 MHz	PA818-F	AES/EBU Panel, (8) F-XLR to F-BNC, PAD to 1 V _{P-P}
Dimensions	Panels: 1 RU x 37mm deep Baluns 20.3mm dia. x 89mm long	PA818-H	AES/EBU Panel, (8): (4) as -F, (4) as -M
Net Weight	Panel: 0.91 kg; Balun: 0.03 kg	PA818-FN	AES/EBU Panel, (8) F-XLR to F-BNC
		PA818-HN	AES/EBU Panel, (8): (4) as -FN, (4) as -M
			* All PA818 panels have isolated outputs standard

© Copyright 1999-2001 Energy Transformation Systems

FatCat5 System panels and information outlets protected under US Patent Number 6,123,577. FatCat5, FatCat5 System, Chameleon Color Coding System, Balanced Star, Balanced Line, Monoline and Precision Wave are trademarks of Energy Transformation Systems. All other brand or product names are or may be trademarks of, and are used to identify, products or services of their respective owners.

Revised 02/10/2004



<http://www.etslan.com>

Energy Transformation Systems, Inc.
 43353B Osgood Road, Fremont, CA 94539
 Toll Free 800-752-8208 Fax 510-656-2026