


PV920WP Series

Component Video Wall Plates

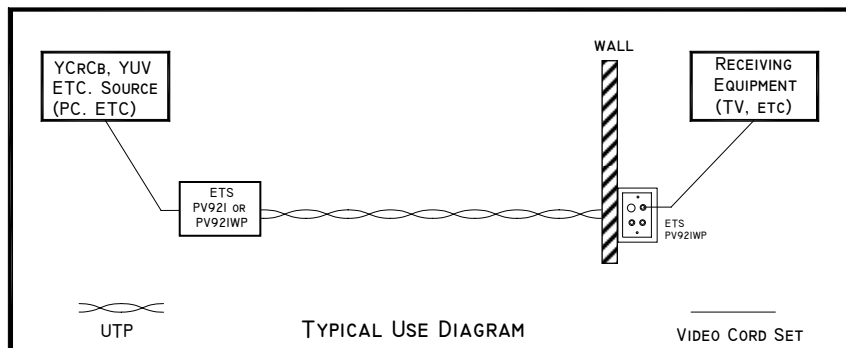

Features/Advantages	Description	Applications
- Decorator wall plates for a sleeker, cleaner professional installation - Easy installation with punch down blocks - Ports are pre-labeled and easily identified - Send Component Video signals on UTP at distances of up to 600 meters (150 meters nominal using CAT3 cable) - Meets FCC Class A - Superior signal balancing, lower crosstalk, less ingress and ghosting - May utilize existing telecom wiring - Made in USA. 100% tested - Available in White or Ivory	New! The ETS PV920WP/PV921WP Component Video Wall Plate has been designed with a new flat circuit board and decorator wall plate giving neater, more professional installations by complementing existing wall plates. For ease of use all ports are pre-labeled giving consistent signal labeling for applications utilizing component video signals. Components video formats include RGB, YUV, YIQ and YCrCb. The PV920WP/PV921WP Wall Plate Balun are functionally identical to the PV890WP, but may be labeled for use with your application as required (YCrCb shown above). Due to custom labeling requirements, additional lead times may apply for these products. YCrCb component video is a recent addition to consumer equipment, found on some DVD players, high-end televisions and home theater equipment. Professional uses include cameras and VTRs based upon any of the above standards.	- DVD/Home Theater - Broadcast Studios - Production and Post-production Facilities - Video Projection Systems - Conference Rooms - Schools

Specifications		Product Ordering Information	
Bandwidth	Flat to 60 MHz, each channel	PV920WP-X	Component Video, (3) FBNC to 110 punch-down
Crosstalk	>50dB	PV921WP-X	Component Video, (3) RCA jacks to 110 punch-down
Connectors	RCA jacks or FBNC to 110 punch down type	PV926WP-X	CV+IR (3) RCA jacks + (1) 3.5mm jack to 110 punch-down
Distance	100 meters minimum		
Media	Category 3 or better Category 5 or better recommended		
Emission	Meets FCC Class A	NOTE: FOR WHITE, X= WH FOR IVORY, X= IV	
Dimensions	79mm x 123mm x 40mm		
Net Weight	0.08 kg (0.11 kg for PV920WP)		

© Copyright 1999-2005 Energy Transformation Systems

FatCat5 System panels and information outlets protected under US Patent Number 6,123,577. FatCat5, FatCat5 System, Chameleon Color Coding System, Balanced Star, Balanced Line, Monoline and Precision Wave are trademarks of Energy Transformation Systems. All other brand or product names are or may be trademarks of, and are used to identify the products or services of their respective owners.

Revised 07/14/2006



<http://www.etslan.com>

Energy Transformation Systems, Inc.
43353 B Osgood Road, Fremont, CA 94539
Toll Free 800-752-8208 Fax 510-656-2026