

Analog Audio Cable High Performance Analog Cable GXAV-LR-XX

Built with the most sophisticated technology and innovative features, GoldX® PlusSeries® Analog Audio Cable by JDI enhances the performance of all your electronic devices. These high-performance cables enable you to obtain a better sound quality from today's sophisticated electronic equipment.

The connectors of the Analog Audio Cable are especially molded to provide a textured comfort grip to make the installation of the product easier. Adding to the ease of installation are integrated labels, which are color-coded for easy identification.

The maintenance of signal integrity is also assured by a high-density, double-layer shielding. An oxygen-free copper durable PVC jacket surrounds the center conductor. This yields a high quality digital signal along with flexibility, strength and appeal. The inner shield has 100% Mylar backed aluminum foil. This prevents high frequency signal noise and interference. The outer shield consists of a 95% copper braid, which prevents most low frequency signal noise and interference.


The 24k gold contacts make for maximum signal transfer and corrosion resistance. The contact's are precision-machined and provides reduced signal loss at the connectors.

Features:


- 24K Gold plated studio grade connectors
- Improved signal transfer with high grade oxygen-free copper wire
- Dual Shielding reduces interference
- Balanced cable for optimum performance
- Designed for Left & Right Channel Audio



Available lengths in Feet

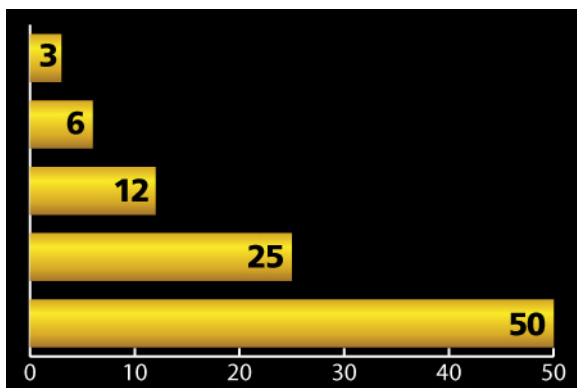

Comfort Grip Molding



© Copyright 2007 Jo-Dan International, Inc. all rights reserved. Plus Series®, PowerCore®, QuickConnect®, Share Plus®, and GoldX® Products are registered trademarks of Jo-Dan International, Inc. All other trademarks and registered trademarks are the property of their respective owners. Designed in USA. Made in China. One or more of the following patents may apply: D494,935, D494,934, D494,932, D493,453, 6,755,676, D490,702, 6,736,658, 6,726,509, 6,716,047, D485,752, D484,044, D481,629, D481,628, 6,607,408, D478,001, D478,000, D468,635, 6,479,607, D465,223, 6,454,584, D462,612, D452,427, D452,426, D451,888, D451,480, D450,303, D448,736, D444,772, D443,862, D443,593, D442,919, D442,556, D442,555, 5,788,521, 5,658,158, 5,334,033, 5,292,257. D503,882; 6,843,684; 6,854,989; 6,872,086; D506,386; 6,905,374; D509,797; 6,991,483; D513,976; 7,004,787; 7,028,114; D519,925; D522,507; 7,258,572
Other patents pending.