

## Digital S-Video Cable High Performance Digital Cable GXAV-SV-XX

GoldX® PlusSeries® Digital S-Video Cables by JDI bring your pictures to life. This S-Video connection will improve the picture and can reduce dot crawl and hanging dots that blur and distort images, providing viewers with crisp detail and sharp definition. Brightness and color signals are separated through the precise technology of separate shielded conductors. This S-Video Cable helps provide the clearest picture with the most accurate and intense colors.

The connectors of the S-Video Cable are especially molded to provide a textured comfort grip to make the installation of the product easier.

The maintenance of signal integrity is also assured by a high-density, double-layer shielding. An oxygen-free copper durable PVC jacket surrounds the center conductor. This yields a high quality digital signal along with flexibility strength and appeal. The inner shield has 100% Mylar backed aluminum foil. This prevents high frequency signal noise and interference. The outer shield consists of a 95% copper braid, which prevents most low frequency signal noise and interference.


The 24k gold contacts make for maximum signal transfer and corrosion resistance. These contacts are precision-machined and provide reduced signal loss at the connectors.

### Features:


- 24K Gold plated studio grade connectors
- Improved signal transfer with high grade oxygen free copper wire
- Corrosion-resistant connectors designed maximum conductivity and low signal loss
- Dual Shielding reduces interference, noise and distortion
- Balanced cable for optimum performance
- Designed for S-Video connections



### Available lengths in Feet

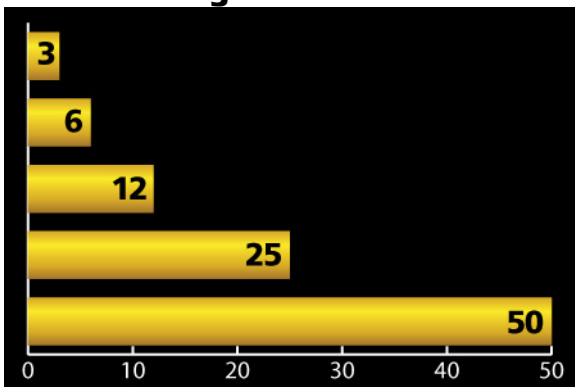

### Comfort Grip Molding



© Copyright 2007 Jo-Dan International, Inc. all rights reserved. Plus Series®, PowerCore®, QuickConnect®, Share Plus®, and GoldX® Products are registered trademarks of Jo-Dan International, Inc. All other trademarks and registered trademarks are the property of their respective owners. Designed in USA. Made in China. One or more of the following patents may apply: D494,935, D494,934, D494,932, D493,453, 6,755,676, D490,702, 6,736,658, 6,726,509, 6,716,047, D485,752, D484,044, D481,629, D481,628, 6,607,408, D478,001, D478,000, D468,635, 6,479,607, D465,223,6,454,584, D462,612, D452,427, D452,426, D451,888, D451,480, D450,303, D448,736, D444,772, D443,862, D443,593, D442,919, D442,556, D442,555, 5,788,521, 5,658,158, 5,334,033, 5,292,257, D503,882; 6,843,684; 6,854,989; 6,872,086; D506,386; 6,905,374; D509,797; 6,991,483; D513,976; 7,004,787; 7,028,114; D519,925; D522,507; 7,258,572. Other patents pending.