



8P8C EZ Category 5e Module, 25 PK

PRODUCT SPECIFICATION

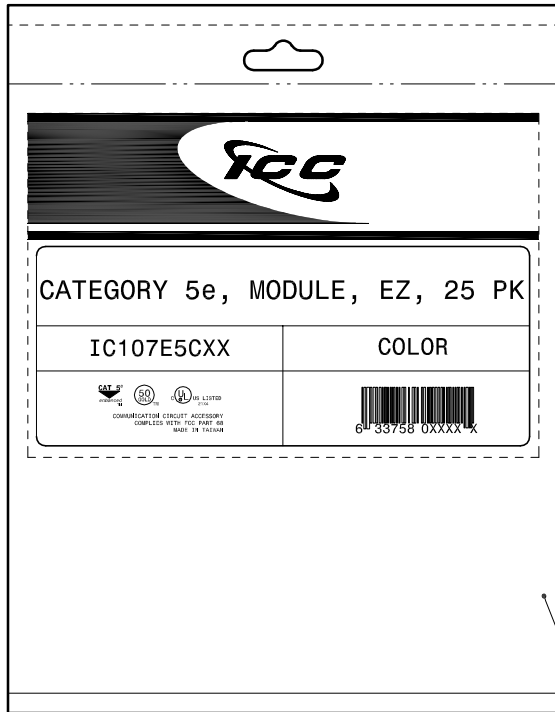


Package includes:

- A. 8P8C EZ Category 5e Module, 25 pcs
- B. Termination Cap, 25 pcs
- C. Installation Instructions, 1 sheet
- D. Packaging Bag, 1 pc



25X 8P8C EZ
CAT 5e Module



25X Termination Cap

Packaging Bag

Features and Benefits:

- CAT 5e rated connectors provide excellent performance for data networks requiring maximum speed and bandwidth
- PCB technology provides maximum performance and superior signal quality
- Enhanced crosstalk cancellation reduces return loss and improves performance by rejecting noise and unwanted signals
- Exceeds ANSI/TIA/EIA-568-B.2 Category 5e connecting hardware requirements
- Engineered to provide 110 IDC termination reducing installation time
- One piece termination cap allows for a quick and easy termination
- Includes an integrated TIA-568A/B color wiring diagram
- Backwards compatible to all lower rated category components
- Compatible with all IC107 faceplates, inserts, surface mount boxes, and blank patch panels
- Compatible with all IC108 furniture faceplates, bezels, and surface mount boxes
- Used with ICC Category 5e ICPCS5 and ICPCS9 series patch cords and 110 punch down tool ICACSPDT00
- Available in black, blue, gray, ivory, orange, red, and white
- 25 modules packaged in packaging bag with 25 termination caps packaged in a separated bag and included in packaging bag
- Installation instructions #MSR-0399-2 included in packaging bag
- UL listed





MODULE, CAT 5E, EZ, 25 PK

ITEM NO.	IC107E5CXX
DWG NO.	PS107E5C00


REV.	D
PAGE NO.	1



CUSTOMER CARE / TECHNICAL SUPPORT * CSR@ICC.COM / 888-ASK-4-ICC (275-4422) * 14700 Alondra Blvd., La Mirada, CA 90638 * www.icc.com



T568B WIRING		T568A WIRING	
2	ORANGE	2	GREEN
1	WHITE/ORANGE	1	WHITE/GREEN
3	WHITE/GREEN	3	WHITE/ORANGE
5	WHITE/BLUE	5	WHITE/BLUE
4	BLUE	4	BLUE
6	GREEN	6	ORANGE
8	BROWN	8	BROWN
7	WHITE/BROWN	7	WHITE/BROWN

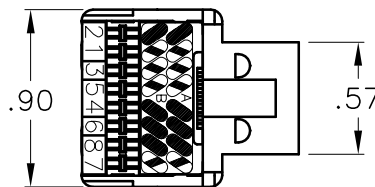

NOTE: UNLESS OTHERWISE SPECIFIED

1. CAT 5E MODULE:

A. ELECTRICAL:

- CURRENT RATING: 1.5 AMPS
- INSULATION RESISTANCE: 500 MOHMS MIN
- CONTACT RESISTANCE: 20 MOHMS MAX
- DC RESISTANCE: 0.1 OHM MAX
- TRANSMISSION PERFORMANCE EXCEEDS CATEGORY 5E CONNECTING HARDWARE REQUIREMENTS SPECIFIED IN TIA/EIA-568-B.2 WHEN USED WITH COMPATIBLE HORIZONTAL CABLE

CATEGORY 5e CONNECTING HARDWARE REQUIREMENTS										
FREQUENCY (MHz)	1.0	4.0	8.0	10.0	16.0	20.0	25.0	31.25	62.5	100
NEXT LOSS (db)	65.0	65.0	64.9	63.0	58.9	57.0	55.0	53.1	47.1	43.0
FEXT LOSS (db)	75.1	63.1	57.0	55.1	51.0	49.1	47.1	45.2	39.2	35.1
RETURN LOSS (db)	35.0	35.0	35.0	35.0	35.0	34.0	32.0	30.1	24.1	20.0
INSERTION LOSS(db)	0.10	0.10	0.10	0.10	0.20	0.20	0.20	0.20	0.30	0.40

B. MECHANICAL:

- PLUG INSERTION LIFE: 750 CYCLES MIN
- PLUG & JACK CONTACT FORCE: 100 GRAMS MIN USING FCC APPROVED PLUG
- PLUG RETENTION FORCE: 30 LBS MIN
- TEMPERATURE: -40ϕX TO 150ϕX F (-40ϕX TO 68ϕX C)


C. PHYSICALS:


- HOUSING: ABS, UL 94V-0
- JACK WIRING: 50 MICRO INCHES OF GOLD OVER 100 INCHES OF NICKEL
- CONNECTOR: INSULATION DISPLACEMENT CONNECTOR (IDC)
ACCEPTS 22~24 AWG SOLID WIRE

D. COLORS: XX: BK-BLACK, BL-BLUE, GY-GRAY, IV-IVORY, OR-ORANGE, RD-RED, & WH-WHITE

2. TERMINATION CAP:

- A. MATERIAL: PC, UL 94V-0
- B. COLOR: LIGHT BLUE



MODULE, CAT 5E, EZ, 25 PK		 Premium Products <i>Proven Performance</i> <i>Competitive Prices</i>	
ITEM NO.	IC107E5CXX		REV. D
DWG NO.	PS107E5C00	PAGE NO.	2

CUSTOMER CARE / TECHNICAL SUPPORT * CSR@ICC.COM / 888-ASK-4-ICC (275-4422) * 14700 Alondra Blvd., La Mirada, CA 90638 * www.icc.com