



P1

Connecting

P2

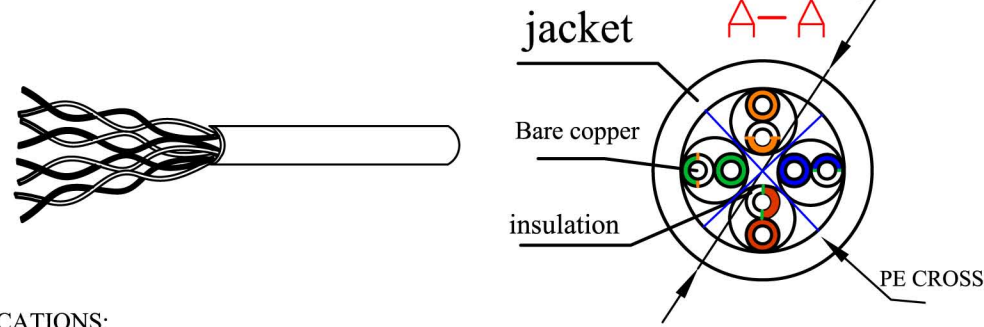

P1	568B COLOR	P2
1	WH/ORG	1
2	ORG	2
3	WH/GRN	3
4	BLU	4
5	WH/BLU	5
6	GRN	6
7	WH/BWN	7
8	BWN	8

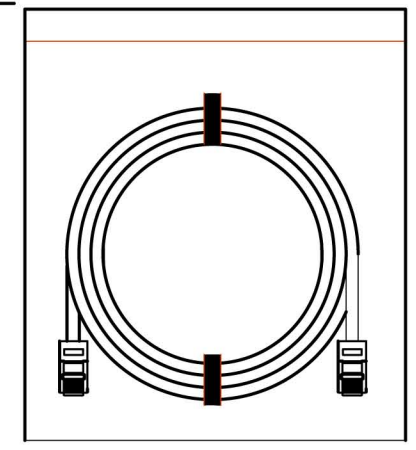

SPECIFICATIONS:

1. CONDUCTOR:
 - 1.1 CONDUCTORS: 24AWG 7*0.196±0.015mm
 - 1.2 CONDUCTOR INSULATION COLOR CODING: ONE WHITE/ORANGE, ONE ORANGE, ONE GREEN, ONE WHITE/GREEN, ONE BLUE, ONE WHITE/BLUE, ONE WHITE/BROWN, ONE BROWN.
2. CABLE JACKET
 - 2.1 PRINTING ON THE JACKET: RoHS COMPLIANT ENHANCED 500MHZ PATCH CORD E213738
24AWG 4PR CM (UL) C(UL) 60°C VERIFIED ISO/IEC 11801 AND ANSI/TIA-568-C.2 CAT6
3. CABLE ASSEMBLY
 - 3.1 SEE SECTION A-A FOR DIMENSIONS
 - 3.2 CABLE TIE: ACCORDING TO CUSTOMER'S REQUEST
 - 3.3 WIRING T568B COLOR
 - 3.4 CONTACT PLUG: UTP RJ45 8P8C 3u AND UL94V-2
4. CABLE JACKET COLOR: ACCORDING TO CUSTOMER'S REQUEST
5. LENGTH: L± 3%mm

REMARK NO	CHA NO	SIGNATURE	DATE	SIGN	W.T	SCALE	UTP CAT6 CABLE 24AWG	
DRAWN BY	MORGAN						PC-CAT6NXX-XXX	
CHECKED BY								
AUDITED BY		APPROVED BY	jonse					
CRAFT		DATE	2010. 2. 1	PAGE OF				