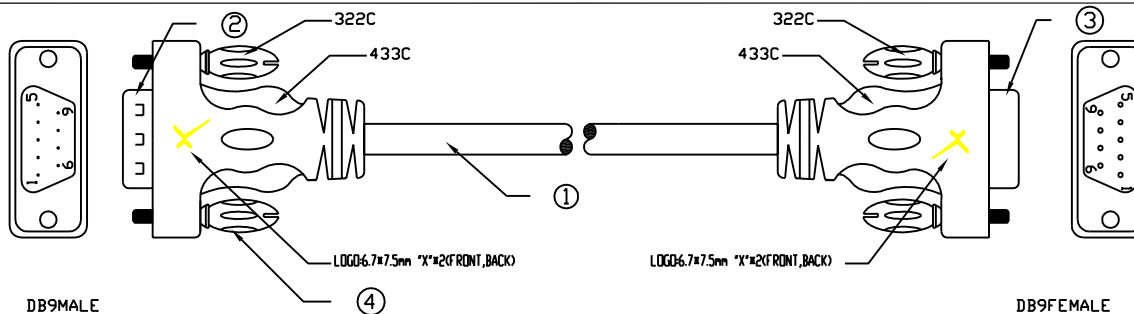


NOTES:

1.MOLDED CONNECTOR END REQUIREMENTS:

A.INNIR MOLD USING PE

B.COPPER FOIL WRAP AND360° SOLDER TO CONNECTOR

C:PVC - 45P PANTONE 433C

2.CABLE:[28AWG (7/0.12)*9C+AL/MY

+DW<7/0.163>+85%BD<16/6/0.12>JTIN

WIRE:OD=0.84±0.05mm

COLOR: P1 COLOR CODE

JACKET:80°C PVC OD=5.0±0.15mm


COLOR:CLEAR-YELLOW WITH GOLD POINT ,PICTURE WITH *X* IN BRAID

3.FINISHED PRODUCTS LENGTH:

(1) LENGTH=1829 mm TOLERANCE:±25.4mm

PIN OUTS		
MALE DB9	WIRE COLOR	FEMALE DB9
1	BLACK	1
2	BROWN	2
3	RED	3
4	ORANGE	4
5	YELLOW	5
6	GREEN	6
7	BLUE	7
8	PURPLE	8
9	WHITE	9
Shell		Shell

INSULATION: UPON 1M ohm AND 1M ohm		ELECTRIC CONDUCTION:INSIDE 1.5K ohm	
4	THUMBSCREW: MALE 3*23.5mm PLATE WITH GOLD	2PCS	PVC/PANTONE 322C
3	CONNECTOR:DB9P FEMALE PLATE WITH GOLD, INSULATOR COLOR:BLACK	1PCS	
2	CONNECTOR:DB9P MALE PLATE WITH GOLD, INSULATOR COLOR:BLACK	1PCS	
1	CABLE:9C+1	1PCS	
ITEM NO	PART NAMES	Q'TY	REMARK

 Products	PRODUCT	DB9P MALE TO DB9P FEMALE	CUSTOMER		DRAWN	Hvon .W	 THREE ANGLE PROJECTION
	CUS,NO	GX128-06	VERSION		CHECKED	Jackson Cang	
	DR,NO		DRAWN DATE	OCT.05.2000	APPROVERD	Jonny Chuang	