


Hospital Grade NEMA 5-15P to IEC C13 Power Cord - 18 AWG, 10A/125V, SJT, Black

P1:	M-005B	
P2:	M-Y087A	
	M-087A	
P3:	M-087B	

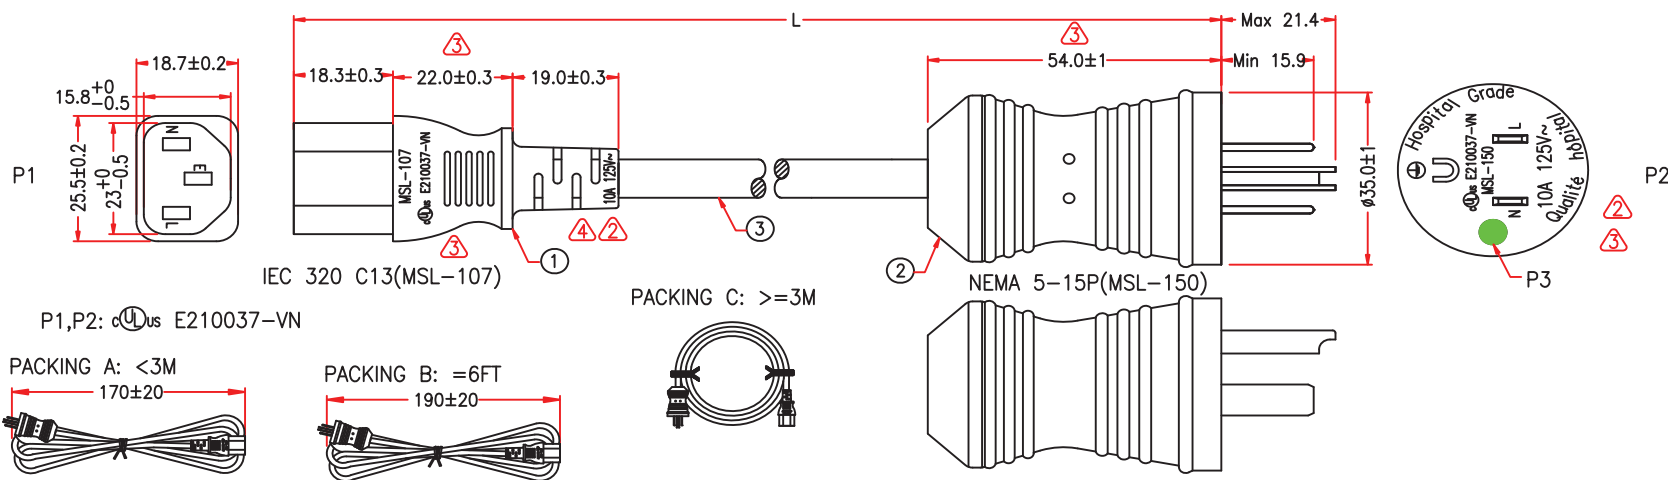

CABLE MARKING:

① (UL) SJT 3/C 18AWG(0.824MM²) VW-1 105°C 300V E204978

C(UL) SJT 3/C 0.824MM²(18AWG) FT2 105°C 300V E204978 MSL-VN-

107150B2F18B(FP327-01)

	P1	P2
BLACK	L	L
WHITE	N	N
GREEN	E	E

Cable Length
Unless Other Spec.
Tolerances:

0 ~200mm	±10mm
201~1000mm	±20mm
1001 ~1500mm	±25mm
1501~2100mm	±30mm
2100mm↑	±40mm

NOTE: All relevant materials are complied with RoHS directive .
THE CABLE MARKING IS CONCAVE LETTERING MOULD

3	UL SJT 18AWG x 3C, OD 7.8mm, JACKET BLACK	Xmm	M304
2	MOLDED PVC 80P, COLOR GREEN		M304
	MOLDED PVC 45P, COLOR BALCK		M304
	MOLDED PVC 35P, COLOR BALCK		M304
	RIVETING CLAW	1	M1220
	TERMINAL: 98478BL-1	1	M257
	TERMINAL: 98693BL-1	2	M257
	MOLDED PVC 35P, COLOR BLACK		M304
	1	BRACKET: YS-003	1
	TERMINAL: 2*4mm, 98740BS-0/A	3	M257

ITEM NO.	8-PCDHG1513-XX-18		UNIT:mm	
 REV.3 2024.10.21	MODIFY MARKING PLUG PRINTING		 REV.4 2025.04.27	ADD CURRENT SYMBQ
 REV.2 2022.04.01	MODIFY P2 WORD MODEL & P1 VOLTAGE			
 REV.1 2021.12.13	MODIFY CABLE LETTERING CONTENT			

NOTE: Cable Length Unless Otherwise Spec. Tolerances: Under 6FT $\pm 25\text{mm}$; Another $\pm 50\text{mm}$