


PIN OUTS (568B)			
WIRE COLOR	RJ45 (P1) PLUG	RJ45 (P2) PLUG	WIRE COLOR
White/Orange	1	1	White/Orange
Orange	2	2	Orange
White/Green	3	3	White/Green
Blue	4	4	Blue
White/Blue	5	5	White/Blue
Green	6	6	Green
White/Brown	7	7	White/Brown
Brown	8	8	Brown

- NOTES:
1. P1,P2, RJ45 (Short) CONNECTOR.
 2. FINISHED PRODUCTS LENGTH: REPLACE XX WITH FIRST NUMBERS ON THE LINE
 - (1) 03 - LENGTH= 914mm TOLERANCE:±25.4mm
 - (2) 05 - LENGTH=1524mm TOLERANCE:±25.4mm
 - (3) 07 - LENGTH=2134mm TOLERANCE:±25.4mm
 - (4) 10 - LENGTH=3048mm TOLERANCE:±50.8mm
 - (5) 14 - LENGTH=4267mm TOLERANCE:±50.8mm
 - (6) 25 - LENGTH=7620mm TOLERANCE:±76.2mm
 - (7) 50 - LENGTH=15240mm TOLERANCE:±76.2mm
 - (8) 100 - LENGTH=30480mm TOLERANCE:±101.6mm
 3. REPLACE CC WITH JACKET COLOR:
 - BK=BLACK, BL=BLUE, GY=GRAY, GR=GREEN, RD=RED, PL=PURPLE, WH=WHITE, YL=YELLOW

CABLE NOTES:

CABLE: 24AWG/7/0.209)*4P+BARE
 INSULATION: HD-PE DD=φ1.0±0.02MM
 COLOR: Blue&White/Blue, Orange&White/Orange, Green&White/Green, Brown&White/Brown,
 JACKET: 80°C PVC DD=φ6.2± 0.3MM
 COLOR: AS SPECIFIED ABOVE
 MARKING: 250MHZ UTP 24AWG 4PAIR 2835 E175723 RJ45 AWM 60°C 30V
 LL212720 CSA AWM I A 80°C 30V FT1 ETL VERIFIED TO TIA/EIA 568B CAT6

 JDI JDI Jo-Dan International, Inc.	PRODUCT	CAT6 patch cable (M)	CUSTOMER	JDI	DRAWN	Z.X.Q	 THIRD ANGLE PROJECTION
	CUS.NO	B6S-cc-XX	VERSION	ONE	CHECKED	Jackson Cang	
DR.NO		DRAWN DATE	DEC27,2001	APPROVED	Eric Lee		

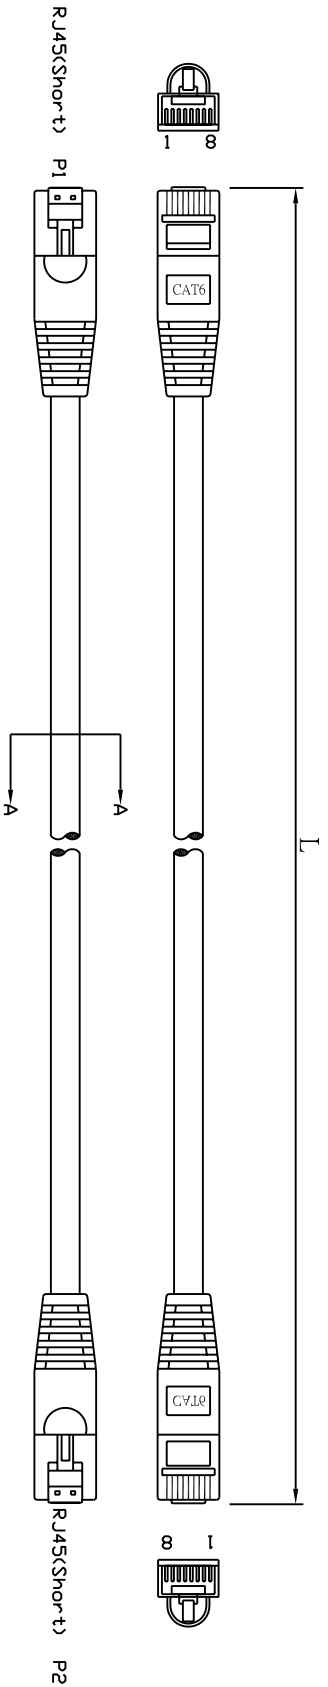


Notes:

1. P1,P2: RJ45(SHORT) CONNECTOR.
2. FINISHED PRODUCTS LENGTH:
3. CABLE: [(24AWG(7/0.209))*4P+BARE
 Insulation: HD-PE DD=Ø1.00,02MM
 Color: Blue&White/Blue, Orange&White/Orange, Green&White/Green, Brown&White/Brown
 Jacket: 80C PVC DD=Ø6.2 ±0.3MM
 Color: Red (5)
 Marking: 250MHZ UTP 24AWG 4PAIR 9L 2835 E175723 AWM 60C 30V
 LL212720 CSA AWM I A 80C 30V FT1 ETL VERIFIED TD T1A/E1A 568B CAT6

PIN OUTS (568B)

Wire Color	RJ45 (P1) Plug	RJ45 (P2) Plug	Wire Color
White/Orange	1	1	White/Green
Orange	2	2	Green
White/Green	3	3	White/Orange
Blue	4	4	Brown
White/Blue	5	5	White/Brown
Green	6	6	Orange
White/Brown	7	7	White/Blue
Brown	8	8	Blue




-XX	Length:	Tolerance:
-01	304.8 MM	± 12 MM
-02	609.6 MM	± 25 MM
-03	914.4 MM	± 25 MM
-04	1219.2 MM	± 25 MM
-05	1524 MM	± 25 MM
-06	1828.8 MM	± 25 MM
-07	2133.6 MM	± 50 MM
-08	2438.4 MM	± 50 MM
-09	2743.2 MM	± 50 MM
-10	3048 MM	± 50 MM
-12	3657.6 MM	± 50 MM
-14	4267.2 MM	± 50 MM
-15	4572 MM	± 75 MM
-20	6096 MM	± 75 MM
-25	7620 MM	± 75 MM
-50	15240 MM	± 100 MM
-75	22860 MM	± 100 MM
-100	30480 MM	± 100 MM

PRODUCT	CUSTOMER	JDI	DRAWN	DATE	VERSION	CHECKED	APPROVED	THREE ANGLE PROJECTION
CAT6 patch cable	JDI	1.0	Checked	15-JAN-03	1.0	Checked	Approved	THREE ANGLE PROJECTION
CUS.NO	DR.NO	B6S-CCX-XX (C=COLOR)	DR.NO					



Jo-Dan International, Inc.



THREE ANGLE PROJECTION