



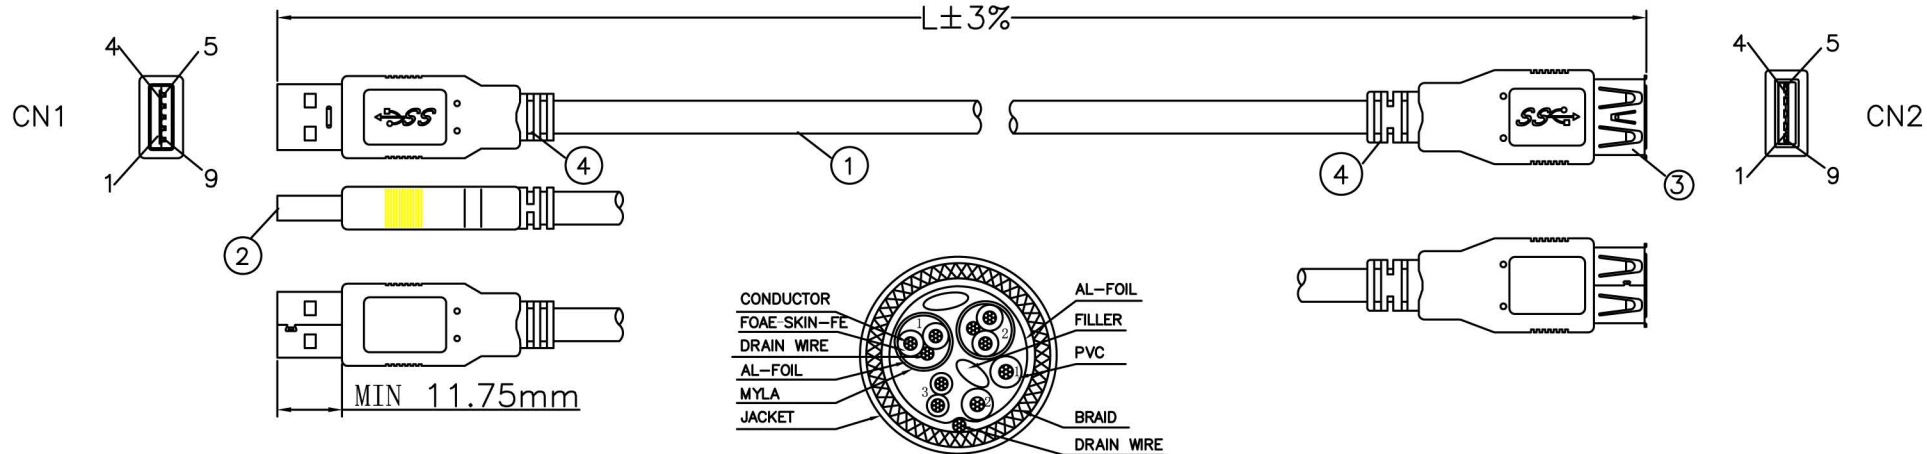

MATERIAL LIST:

NO.	PARTS NAME	SPECIFICATION DESCRIPTION
①	CABLE	2* (1P*28AWG+D+AL+MYLA) +1P*28AWG +2C*24AWG+AL+D+B(60%) OD:6.0mm COLOR:BLUE
②	USB 3.0 CONNECTOR	USB A MALE 9P INSULATOR BLUE SOLDER TYPE PIN GOLD PLATED NICKEL PLATED SHELL
③	USB 3.0 CONNECTOR	USB A FEMALE 9P INSULATOR BLUE SOLDER TYPE PIN GOLD PLATED NICKEL PLATED SHELL
④	MOLDING PVC	MOLDING PVC 501 45P COLOR:BLUE



PIN OUT	
CN1	CN2
1 ——— RED	1
2 ——— WHITE	2
3 ——— GREEN	3
4 ——— BLACK	4
5 ——— BLUE	5
6 ——— YELLOW	6
7 ——— DRAIN WIRE	7
8 ——— VIOLET	8
9 ——— ORANGE	9

SHELL ——— BRAID ——— SHELL

ELECTRONIC TEST:

- A.OPEN/SHORT/INTERMITTENCE: 100%.
B.HI-POT: 300V DC/sec
C.INSULATION RESISTANCE: 20M ohm (MIN)
D.CONDUCTIVE RESISTANCE: 2 ohm (MAX)

							U3-AAMF-XX	
REMARK NO	CHA NO	SIGNATURE	DATE	SIGN			W.T	SCALE
DRAWN BY								
CHECKED BY								
AUDITED BY		APPROVED BY						
CRAFT		DATE	2011.09.03	PAGE OF			ITEM NO. (SECTION SHEET)	