



HDMI T/N	0-106(A)
HDMI C T/N	0-204(A)

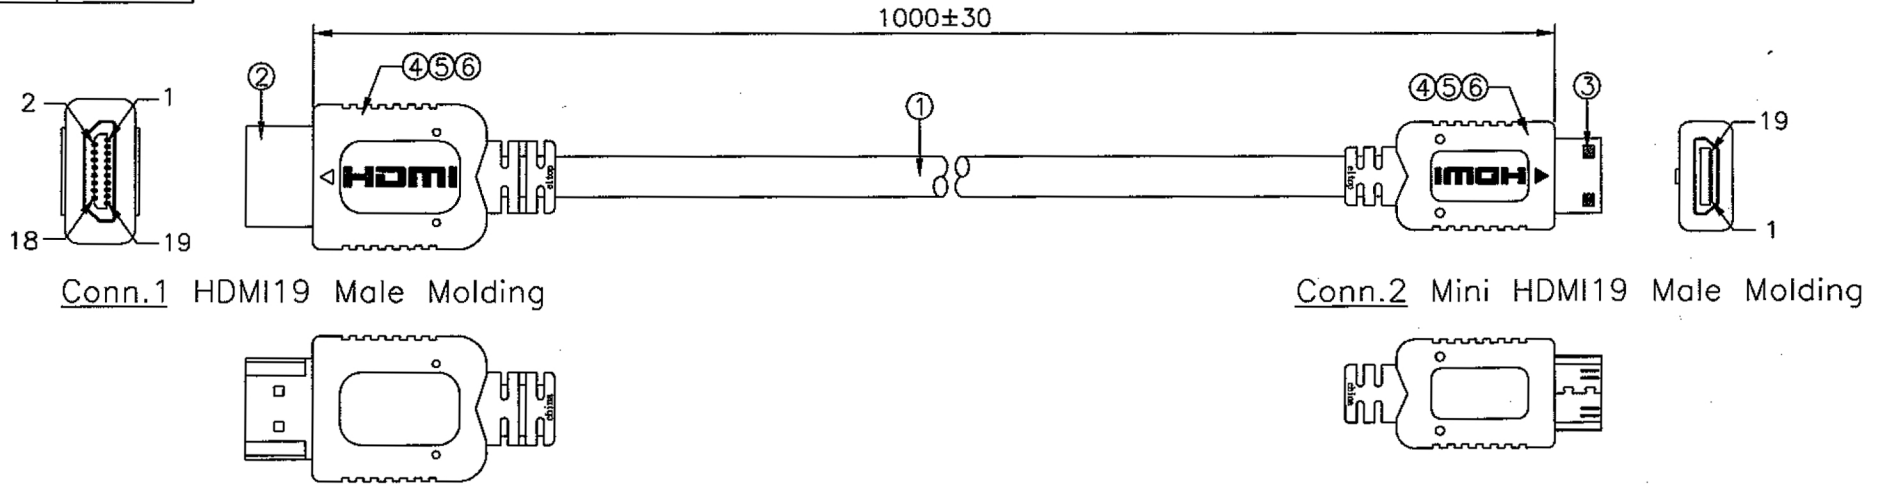

Conn.1 HDMI19 Male Molding

Conn.2 Mini HDMI19 Male Molding

Pin Assignment

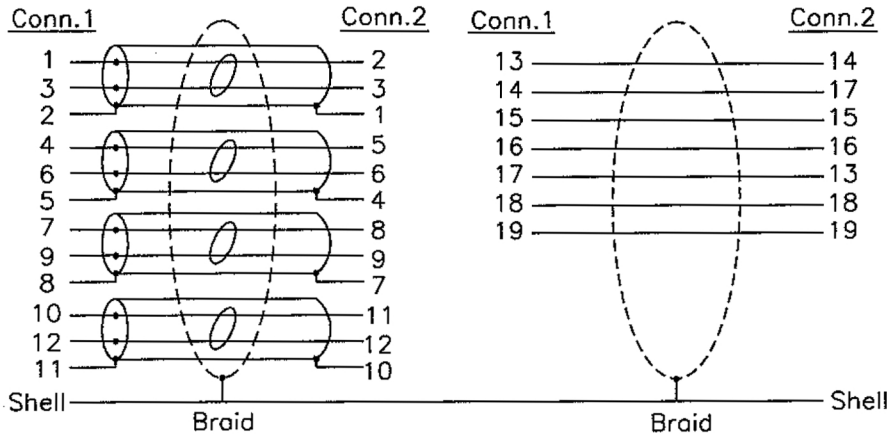

Electronic Test:

- 1.100% Test,(Open,Short,Miss Wire)
- 2.Contact Resistance: 2 ohm max
- 3.Insulation Resistance: 10M ohm min
- 4.Hi-pot: 300V DC/10ms

NO.	P/N	DESCRIPTION	Q'TY	UNIT
⑥	R87-04020	Copper Foil W=2.0cm	10/100	M
⑤	R90-45006	Outside Molding 45P PVC Color PMS:3U2X(Black)	10/1000	KG
④	R91-01001	Inside Molding: PE	6/1000	KG
③	R79-19018	Mini HDMI19 Male Shell Gold Plated W/PCB	1	PCS
②	R79-19013	HDMI19 Male Shell Gold Plated W/PCB	1	PCS
①	61-15064	HDMI UL20276[30AWGx1P+DW+AL/Mylar]x4+30AWGx7C+AL/MY+DW+BD+Jacket PMS:3U2X(Black) OD:5.5±0.15	1	M

ComputerCableStore.com		RoHS COMPLIANT			
DESCRIPTION		1M Mini HDMI M to HDMI M Gold Connector Black			
CUSTOMER P/N					
HS CODE	MODEL NO.				
UPC	BAFO NO.				
DRAW.	Lc	DWG NO.	REV.	4	
CHECK.	DATE.	2007.09.12	SCALE.	NONE	
APP.	WJ	SIZE.	A4	UNIT.	mm
				SHEET	1/4