

# CAT5•3000

KVM and USB Extender

Extend two monitors, USB, ADB, PS/2, RS-232 and Audio with CAT-5 cables up to 330 feet away from your computer.



## Features

- Saves money on cable and hardware costs
- Saves space on your desktop
- Convenient, flexible and expandable
- Includes one CAT5•3000S send unit and two CAT5•3000R receive units
- Eliminates computer noise where you work
- Maintains highest resolution video
- Supports any type of CRT or LCD analog monitor
- For PC or Mac computers using PS/2, ADB or USB
- Extends RS-232 tablets
- Extends RS-232 touchscreens
- Extends audio for multimedia applications


The ex-tend-it CAT5•3000 extends two monitors, USB, ADB/PS2, RS-232 and audio up to 330 feet from your computer.

## How it works

The CAT5•3000S send unit sits next to your computer. Cables supplied with the CAT5•3000 package connect your CPU to the send unit. Two

## Includes

1. CAT5•3000S
2. 2x CAT5•3000R
3. 2x 6 foot VGA cable
4. 2x 6 foot PS/2 cable
5. 6 foot USB cable
6. 2x 17 volt power supply
7. 1x 16 volt power supply

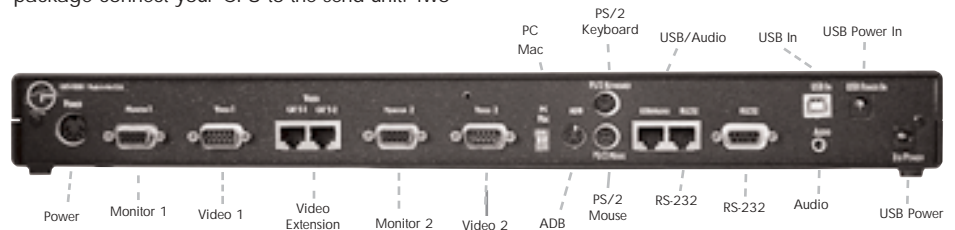

CAT5•3000R receive units sit next to the two monitors, keyboard and mouse - up to 330 feet away. Monitors, keyboard and mouse plug into the back of the CAT5•3000R receive units. CAT-5 extension cables up to 330 feet long connect the CAT5•3000S send and the CAT5•3000R receive units to each other.

The CAT5•3000 uses "Extreme USB" technology.

## Specifications:

- Video Amplifier Bandwidth:** 350 MHz
- Actual Bandwidth:** 120 MHz
- Input Video Signal:** 1.2 volts p-p
- Input Sync Signal:** 5 volts p-p (TTL)
- Horizontal Frequency Range:** 15-70 KHz
- Vertical Frequency Range:** 30-170 Hz
- Focus Adjustment:** nominal
- Brightness Adjustment:** nominal
- CAT-5 Connector:** RJ-45
- ADB Keyboard Connectors:** 4Pin MiniDin
- PS/2 Keyboard/Mouse Dual Connectors:** 6 Pin MiniDin
- Power Consumption:** 15 Watts (max.)
- Power Supply:** External 16 VAC 2A
- Dimensions:** 16"W x 1.75"H x 4"D
- Shipping Weight:** 16 lbs.

