


PV840 Series

Extended Baseband Video Baluns

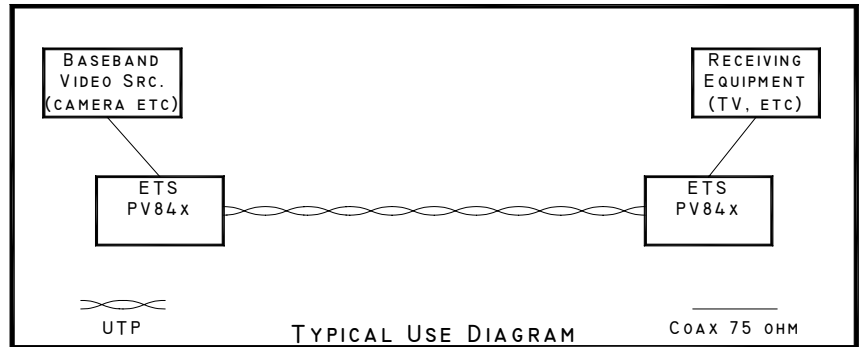

Features/Advantages	Description	Applications
<ul style="list-style-type: none"> • Use UTP for long distance signal transmission with superior performance and easy, low cost installation • Greater stability with wider bandwidth (0 to 60 MHz) • Rugged plastic cases • Made in USA. 100% QA. 	<p>The ETS PV840 Extended Baseband Video Baluns allows you the freedom to use UTP instead of costly coax to transmit baseband video signals throughout your facility, with better signal characteristics, at a lower cost. Depending on your application, you may be able to utilize previously installed wiring, with a corresponding dramatic improvement in cost of installation.</p> <p>Single, Dual and Quad baseband video baluns are available. Using the PV845, Quad Balun. You can transmit 4 distinct baseband video signals on a single run of Cat5 or better UTP, utilizing all four pairs in the cable. Since each pair has a carefully balance signal on it, you can run video in two directions on different pairs simultaneously.</p> <p>The PV840 Series of baluns supports color video at distances in excess of 330 meters, depending on cable type. Black and white signals will typically be supported up to 750 meters.</p>	<ul style="list-style-type: none"> • ALL baseband video applications • Security and Surveillance • Video Terminals, Displays

Specifications		Product Ordering Information	
Bandwidth	Flat to 60 MHz	PV843	EBV Balun MBNC to RJ45 jack, pins 7, 8
Connectors	BNC (female or male) to RJ45 jack	PV844	EBV Balun RCA jack to RJ45 jack, pins 4, 5
		PV844B	EBV Balun RCA jack to RJ45 jack, pins 5, 4
Crosstalk	>50dB	PV845	Quad Baseband Video Balun FBNC to RJ45, all pins
Media	Category 5 or better	PV846	Dual Baseband Video Balun, FBNC to RJ45 5,4 & 7, 8
		PV847	Quad Baseband Video Balun, RCA jacks to RJ45, all pins
Dimensions	46mm x 25mm x 19mm	PV848	EBV Balun, MBNC to RJ45 jack pins 5, 4
	66mm x 66mm x 28mm (PV845, 846, 847)	PV849	EBV Balun, FBNC to RJ45 jack, pins 5, 4
Net Weight	0.02 kg (0.1 kg PV845)	PV848S	EBV Balun, MBNC to Screw Terminal
		PV849S	EBV Balun, FBNC to Screw Terminal
		PV845S	Quad Video/EBVB, FBNC to Screw Term all pairs used
		PV842S	F Connector to Screw Terminal

Revised 04/04/05

